
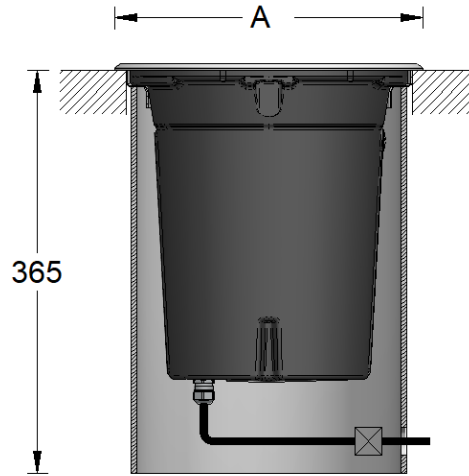



ALTAÏR COB (2025-00)

COB LED Ground recessed luminaire




A = Ø 280mm (Recouvrant / Covering)

A = Ø 260mm (Arasant / Trimless)



Sortie câble DMX



. Material :	Body : Anodized cast Aluminium Anodized Aluminium - Stainless steel 316L Tempered glass extra white	. Epoxy Paint :	Optional
. Fixing :	Ground recessed		
. LED Source :	1 LED 3 SDCM - L90B10 at 50.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	2950lm - LP (at 3000K-7°) 6850 lm - HP (at 3000K-7°)	. Typ. Efficacy :	100lm/W / 107lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	7° / 14° / 15° / 21° / 32° / 38° / 71° / 73°	. High pressure :	No
. Adjustable :	± 20°	. Water Resistance :	IP67
. Weight :	7Kg	. Impact :	IK10
. Dimensions :	Ø 260mm (Ø280)x365mm	. Static load :	1.5T
. Power supply :	230VAC	. Protection Class :	Class I
. Max Power :	30W - LP 67W - HP	. Energy Class :	E
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Included
. Cables :	1ml standard H07RNF - (3G1 black) - On-Off 3ml standard H07RNF - 2 cables (3G1 black) - DALI / 1-10V		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		