



ALTAÏR

24 LED Ground recessed luminaire

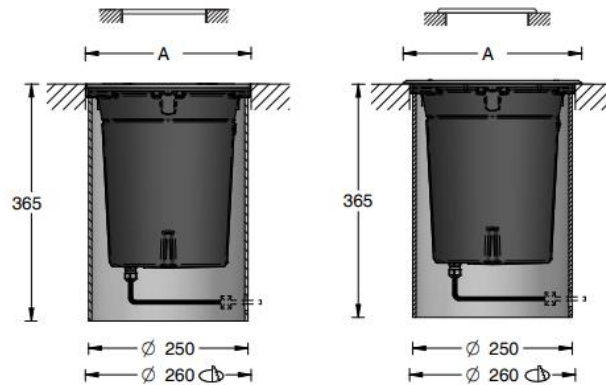

A = Ø 260mm (Arasant / Trimless)
A = Ø 280mm (Recouvrant / Covering)



Sortie câble DMX

- . **Material :** Body in anodized cast aluminium
Anodized Alum. Disc - Stainless steel 316L (Epoxy paint optional)
Tempered glass extra white
- . **Fixing :** Ground recessed
- . **LED Source :** 6x4 LED / 24 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
RGB / DynW / RGBNW
- . **Product flux :** 4500lm (at 3000K-12°)
- . **Efficacy :** 116lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)
- . **Adjustable :** Yes
- . **Dimensions :** Ø 260mm x 365mm / Ø 280mm x 365mm
- . **Weight :** 7Kg
- . **Protection :** IP67
- . **Impact :** IK10
- . **Static load :** 1.5T
- . **High pressure :** No
- . **Protection Class :** Class I
- . **Power :** 42.7W
- . **Power supply :** 230VAC
- . **Driver :** Included
- . **Control :** On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (3x1mm² black) - Monochrome
3ml standard - 2 câbles (3x1mm² black) - DynW / RGBNW
- . **Energy class :** D
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty :** 2 years standard