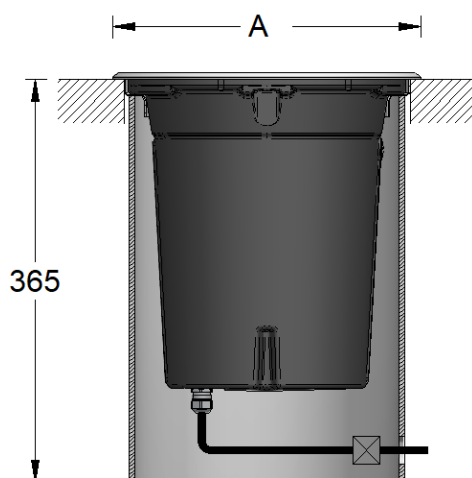


. Material :	Body : Anodized cast Aluminium	. Epoxy Paint :	Optional
	Anodized Aluminium - Stainless steel 316L		
	Tempered glass extra white		
. Fixing :	Ground recessed		
. LED Source :	24 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures. DynW / RGBNW		
. Luminous flux :	4500lm (at 3000K-12°)	. Typ. Efficacy :	116lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)	. High pressure :	No
. Adjustable :	Yes	. Water Resistance :	IP67
. Weight :	7Kg	. Impact :	IK10
. Dimensions :	Ø 260mmx365mm / Ø 280mmx365mm	. Static load :	1.5T
. Power supply :	230VAC	. Protection Class :	Class I
. Max Power :	42.7W	. Energy Class :	D
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver :	Included
. Cables :	1ml standard H07RNF - (3G1 black) - On-Off 3ml standard H07RNF - 2 cables (3G1 black) - DALI / 1-10V 3ml standard H07RNF - (3G1 black) + AD8 - (6x0.22mm² black) - DMX		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		