
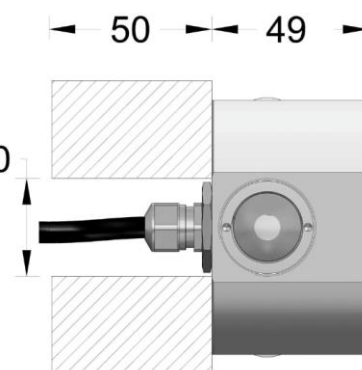


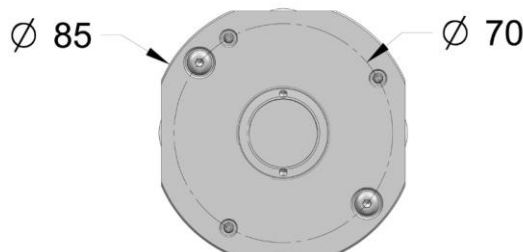

. Material :	Body : Anodized Aluminium	. Epoxy Paint :	Optional
	-		
	Tempered glass extra white		
. Fixing :	Wall		
. LED Source :	2 / 3 / 4 LED 3 SDCM	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Autres températures possibles.		
. Luminous flux :	129lm (at 3000K-2LED-VNSP)	. Typ. Efficacy :	56lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	VNSP	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP65
. Weight :	0.7Kg	. Impact :	-
. Dimensions :	Ø85mmx49mm	. Static load :	-
. Power supply :	350mA	. Protection Class :	Class III
. Max Power :	2.3W - 5.6W	. Energy Class :	-
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Included
. Cables :	1ml standard AD8 - (2x0.50mm ² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		