


BORNE DARCY (2025-00)

Asymmetrical bollard for walkway's lighting

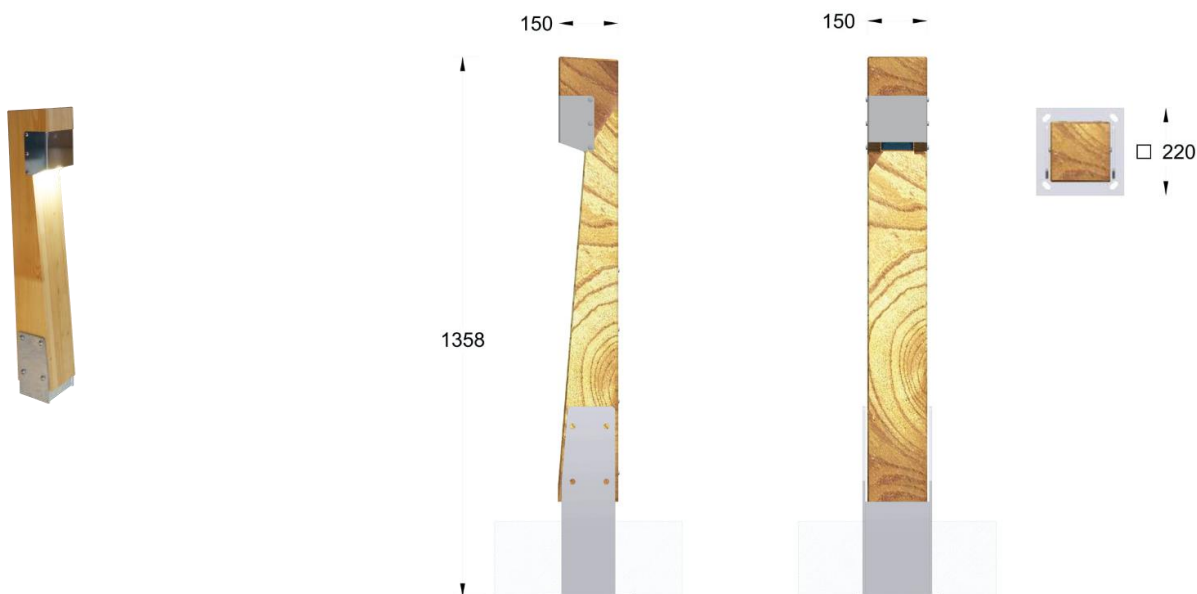

. Material :	Exotic wood or painted steel structure	. Epoxy Paint :	Optional
	-		
	PMMA glass		
. Fixing :	Ground		
. LED Source :	4 LED 3 SDCM - L90B10 à 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	427lm (at 3000K-Asy_216)	. Typ. Efficacy :	88lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Asymmetrical (PMR norm)	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP67
. Weight :	-	. Impact :	IK10
. Dimensions :	1358mmx150mmx□220mm	. Static load :	-
. Power supply :	240VAC	. Protection Class :	Class I
. Max Power :	5.8W	. Energy Class :	-
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Included
. Cables :	1ml standard AD8 - (2x0.50mm ² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		