


# BORNE HASLA (2025-00)

Asymmetrical bollard for walkway lighting

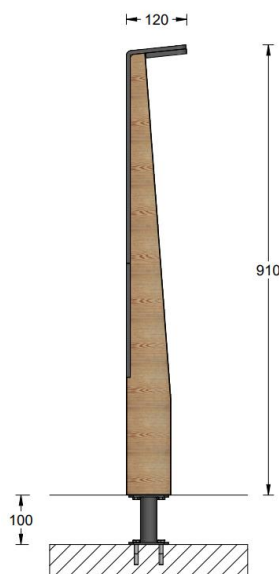

|                   |                                                         |                      |             |
|-------------------|---------------------------------------------------------|----------------------|-------------|
| . Material :      | Exotic Wood and painted Steel                           | . Epoxy Paint :      | Optional    |
|                   | -                                                       |                      |             |
|                   | PMMA glass                                              |                      |             |
| . Fixing :        | On rigid foundation                                     |                      |             |
| . LED Source :    | 4 LED 3 SDCM - L90B10 at 100.000hr                      | . Operating T° :     | -20°C/+40°C |
| . Color T° :      | 2700K / 3000K - Other possible temperatures.            |                      |             |
| . Luminous flux : | 707lm (at 3000K-Asy_216)                                | . Typ. Efficacy :    | 88.4lm/W    |
| . CRI :           | 80+ / 90+                                               | . UV Resistance :    | -           |
| . Optic :         | Asymmetrical (French PMR compatible)                    | . High pressure :    | No          |
| . Adjustable :    | No                                                      | . Water Resistance : | IP67        |
| . Weight :        | 12Kg                                                    | . Impact :           | -           |
| . Dimensions :    | 120mmx120mm - H = 910mm                                 | . Static load :      | -           |
| . Power supply :  | 230VAC                                                  | . Protection Class : | Class I     |
| . Max Power :     | 8.4W                                                    | . Energy Class :     | F           |
| . Control :       | On-Off / 1-10V / DALI (with adequate driver)            | . Driver :           | Included    |
| . Cables :        | 1ml standard H07RNF - (3G1 black) - On-Off              |                      |             |
| . Norms :         | NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471 |                      |             |
| . Warranty :      | 2 years standard (extendable to 5 years on demand)      |                      |             |