


BORNE SEMPLI (2025-00)


Asymmetrical bollard for walkway lighting

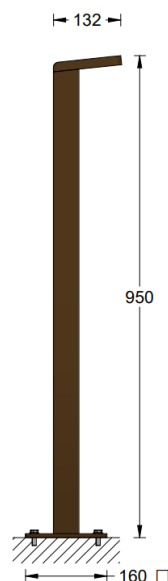

. Material :	Painted Steel structure	. Epoxy Paint :	Optional
	-		
	PMMA glass		
. Fixing :	On ground		
. LED Source :	4 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K - Other possible temperatures.		
. Luminous flux :	707lm (at 3000K-Asy_216)	. Typ. Efficacy :	88.4lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Asymmetrical (« PMR » compatible)	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP67
. Weight :	8.2Kg	. Impact :	IK10
. Dimensions :	160mmx160mm - H = 950mm	. Static load :	-
. Power supply :	230VAC	. Protection Class :	Class I
. Max Power :	8.4W	. Energy Class :	F
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Included
. Cables :	1ml standard H07RNF - (3G1 black) - On-Off		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		

BORNE SEMPLI MINI (2025-00)

Asymmetrical bollard for walkway lighting

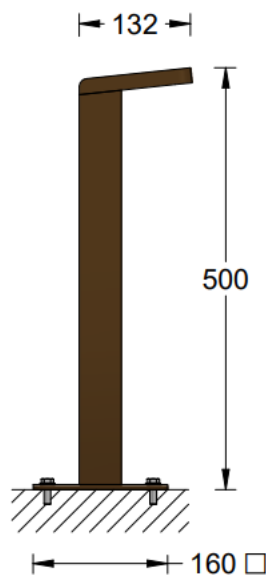

. Material :	Painted Steel structure	. Epoxy Paint :	Optional
	-		
	PMMA glass		
. Fixing :	On ground		
. LED Source :	4 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K - Other possible temperatures.		
. Luminous flux :	707lm (at 3000K-Asy_216)	. Typ. Efficacy :	88.4lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Asymmetrical (« PMR » compatible)	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP67
. Weight :	-	. Impact :	IK10
. Dimensions :	160mmx160mm - H = 500mm	. Static load :	-
. Power supply :	230VAC	. Protection Class :	Class I
. Max Power :	8.4W	. Energy Class :	F
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Included
. Cables :	1ml standard H07RNF - (3G1 black) - On-Off		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		