
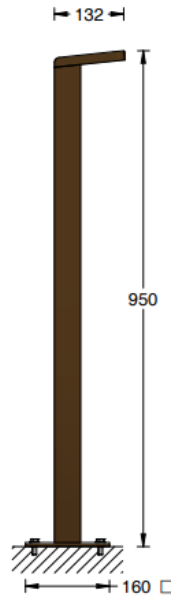


BORNE SEMPLI

Asymmetrical bollard for walkway lighting



- . **Material :** Painted steel
PMMA glass
- . **Fixing :** Ground
- . **LED Source :** 4 LED 3-SDCM - L90B10@100.000hr
- . **Colour T° :** 2700K / 3000K - Other possible temperatures, contact us.
- . **Product flux :** 707lm (at 3000K-Asy_216)
- . **Efficiency :** 88.4lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** Asymmetrical (« PMR » compatible)

- . **Adjustable :** No
- . **Dimensions :** 160mm x 160mm - H = 950mm
- . **Weight :** 8.200Kg



- . **IP Protection :** IP67
- . **Impact :** IK10
- . **Static load :** -
- . **High pressure :** No

- . **Protection Class :** Class I
- . **Power :** 8.4W
- . **Power supply :** 230VAC
- . **Driver :** Included
- . **Control :** On-Off / 1-10V* / DALI* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (3x1mm² black)

- . **Energy class :** F
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty :** 2 years standard

BORNE SEMPLI MINI

Asymmetrical bollard for walkway lighting

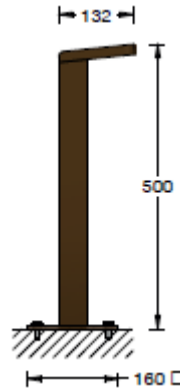

- . **Material :** Painted steel
PMMA glass
- . **Fixing :** Ground
- . **LED Source :** 4 LED 3-SDCM - L90B10@100.000hr
- . **Colour T° :** 2700K / 3000K - Other possible temperatures, contact us.
- . **Product flux :** 707lm (at 3000K-Asy_216)
- . **Efficiency :** 88.4lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** Asymmetrical (« PMR » compatible)

- . **Adjustable :** No
- . **Dimensions :** 160mm x 160mm - H = 500mm
- . **Weight :** -

- . **IP Protection :** IP67
- . **Impact :** IK10
- . **Static load :** -
- . **High pressure :** No

- . **Protection Class :** Class I
- . **Power :** 8.4W
- . **Power supply :** 230VAC
- . **Driver :** Included
- . **Control :** On-Off / 1-10V* / DALI* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (3x1mm² black)

- . **Energy class :** F
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty :** 2 years standard