
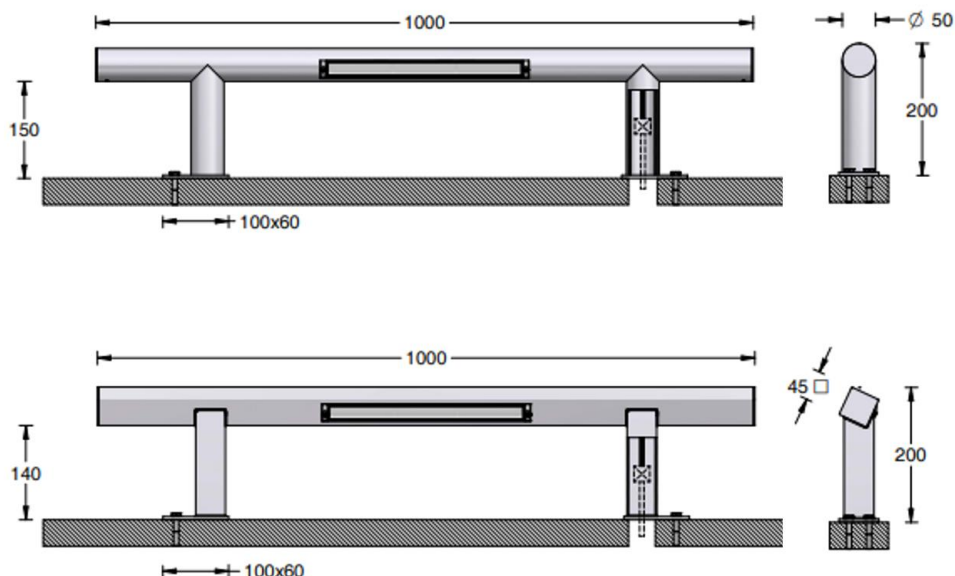


CHASSE-ROUE (2025-00)

Linear lighting guardrail



. Material :	Body : Steel	. Epoxy Paint :	Optional
	-		
	PMMA glass		
. Fixing :	On ground		
. LED Source :	9 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700 / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	100lm (at 3000K-Asy_360)	. Typ. Efficacy :	74lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Asymmetrical	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP54
. Weight :	5.3Kg	. Impact :	-
. Dimensions :	1000mmx200mm	. Static load :	-
. Power supply :	24VDC / 230VAC	. Protection Class :	Class II / Class III
. Max Power :	0.9W - 1.4W	. Energy Class :	F / E
. Control :	On-Off / 1-10V (24VDC) / DALI (24VDC) (with adequate driver)	. Driver :	24VDC Remote 230VAC Included
. Cables :	1ml standard AD8 - (2x0.75mm ² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		