


# CHASSE-ROUE

## Linear lighting guardrail

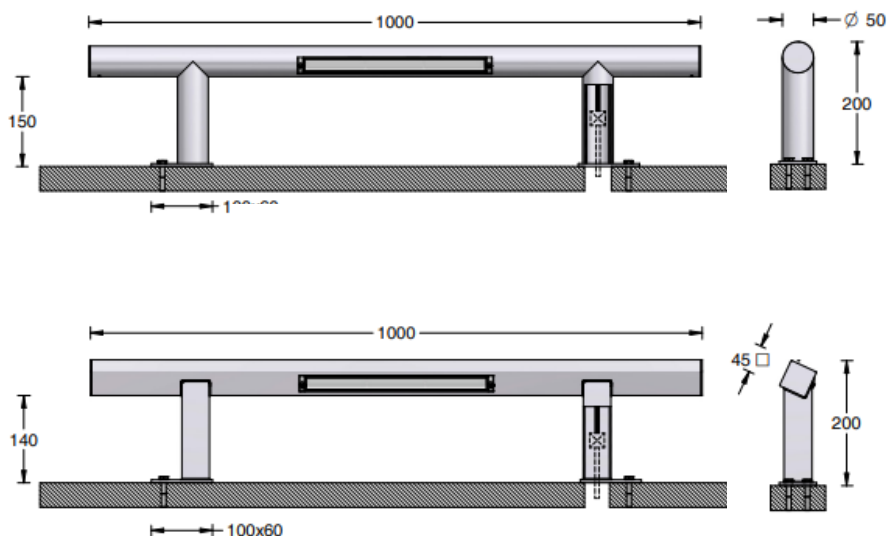

- . **Material:** Body in Steel  
PMMA glass
- . **Fixing :** On ground
- . **LED Source :** 9 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700 / 3000K / 4000K - Other possible temperatures, contact us.
- . **Product flux :** 100lm (at 3000K-Asy\_360)
- . **Efficacy :** 74lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** Asymmetrical
  
- . **Adjustable :** No
- . **Dimensions :** 1000mm x 200mm / 1000mm x 200mm
- . **Weight :** 5.30Kg
  
- . **Protection :** IP54
- . **Impact :** -
- . **Static load :** -
- . **High pressure :** No
  
- . **Protection Class :** Class II / Class III
- . **Puissance / Power :** 1.4W / 0.9W
- . **Alimentation / Power supply :** 230VAC / 24VDC
- . **Convertisseur / Driver :** Remote
- . **Pilotage / Control :** On-Off / 1-10V\* / DALI\* (with adequate driver)  
\* Smartphone bluetooth CASAMBI control option possible
- . **Câblage / Cables :** 1ml standard - (2x0.75mm<sup>2</sup> black)
  
- . **Energy class :** F (230VAC) / E (24VDC)
- . **Normes / Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471/
- . **Garantie / Warranty:** 2 years standard