
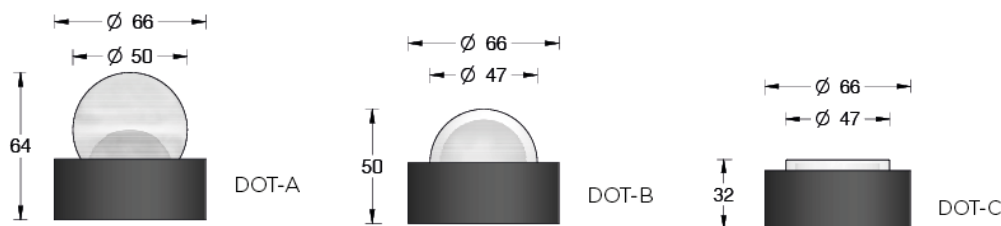


DOT

Small Façade Fixture



- . **Material:** Body in anodized Aluminium (Epoxy paint optional)
Frosted PMMA glass
- . **Fixing :** Wall
- . **LED Source :** 1x4 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
RGBW
- . **Product flux :** Contact us
- . **Efficacy :** Contact us
- . **CRI :** **80+**
- . **Optic :** Diffuse
- . **Adjustable :** No
- . **Dimensions :** DOT-A: Ø66 x 50mm x 64mm (or custom)
DOT-B: Ø66 x 47mm x 50mm (or custom)
DOT-C: Ø66 x 47mm x 32mm (or custom)
- . **Weight :** 0.742Kg
- . **Protection :** IP67
- . **Impact :** -
- . **Static load :** -
- . **High pressure :** No
- . **Protection :** Classe III
- . **Power :** 9.1 W
- . **Power supply :** 700mA / 24VDC
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (2x0.50mm² noir) - Monochrome
3ml standard - (6x0.22mm² noir) - DynW / RGBW
- . **Norms :** NF-EN 60529/60598-1-A1/60598-2-1/60598-2-3-A1/60598-2-5/62471
- . **Energy class:** G
- . **Warranty:** 2 years standard