

GEMINI MAX





Encastré de sol ou plafond 9 LED
9 LED Ground or ceiling recessed luminaire



Source / Source	9 LED 3-SDCM - L90B10@100.000hr	
T° de couleur / Color T°	Monochrome / RGB	
Flux produit / Product flux ¹	1550lm	
Efficacité / Efficacy	~ 123lm/W	
Optique / Optic	12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)	
Orientable / Adjustable	Non / No	
Puissance / Power	16.8W_max	
Alimentation / Power supply	500mA_max	230VAC
Classe énergie / Energy class	E	
Pilotage / Control ²	On-Off / 1-10V / DALI / DMX (Déporté / Remote)	
Câblage / Cables ³	1ml standard - 2x0.5mm² noir (Monochrome) / 3ml standard - 6x0.22mm² noir (RGB)	
Disque / Disk	Rond Arrasant (1) Trimless round	Rond Recouvrant (2) Covering round
(A) Dimension disque / Disk size	Ø146mm	Ø160mm
Options / Options	LED COLOR CUSTOM CABLE +1M RAL Connect. IP68 Kit connex. IP68 Filtre strié Grille nid d'abeille Verre dépoli Système antivol Verre poly. Vis antivol	

¹ 3000K-12° en sortie produit / 3000K-12° at product output
² A commander séparément selon driver / To order separately with adequate driver
³ Certifié usage extérieur / Certified for outdoor use

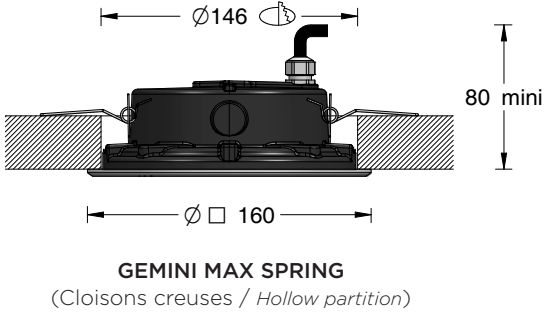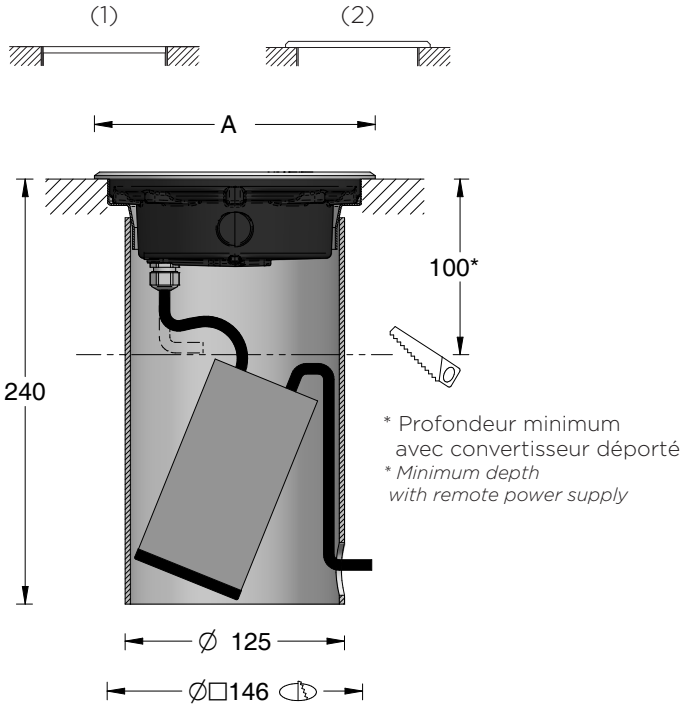

- Encastré à efficacité lumineuse élevée / Recessed luminaire with high luminous efficacy
- Large gamme d'optiques / Wide range of optical lenses

GEMINI MAX






GEMINI MAX SPRING

9 LED



2024-00

ALUMINIUM / Aluminium



T° couleur Color T°	Optique Optic	Flux* Flux*	Puissance** Power**	500mA
2700K	NSP (12°)	1443lm	14.4W	F21.214.006.0
2700K	SP (24°)	1446lm	14.4W	F21.314.006.0
2700K	FL (30°)	1380lm	14.4W	F21.414.006.0
2700K	WFL (50°)	1254lm	14.4W	F21.514.006.0
3000K	NSP (12°)	1550lm	14.4W	F21.214.000.0
3000K	SP (24°)	1553lm	14.4W	F21.314.000.0
3000K	FL (30°)	1482lm	14.4W	F21.414.000.0
3000K	WFL (50°)	1347lm	14.4W	F21.514.000.0
4000K	NSP (12°)	1764lm	14.4W	F21.224.000.0
4000K	SP (24°)	1768lm	14.4W	F21.324.000.0
4000K	FL (30°)	1687lm	14.4W	F21.424.000.0
4000K	WFL (50°)	1533lm	14.4W	F21.524.000.0
RGB	NSP (12°)	193-371-136lm	14.4W	F21.2Y4.000.0
RGB	SP (24°)	196-376-138lm	14.4W	F21.3Y4.000.0
RGB	FL (30°)	191-367-135lm	14.4W	F21.4Y4.000.0
RGB	WFL (50°)	187-359-132lm	14.4W	F21.5Y4.000.0

*Flux en sortie produit / Net luminaire output

**Puissance max / Maximum power

Dimensions câbles / Cable dimensions	
Monochrome (500mA)	2 x 0.5 mm2 - Ø5.8mm
RGB	6 x 0.22 mm2 - Ø7mm



GEMINI MAX SPRING

9 LED



2024-00

INOX 316L / Stainless steel   Ø160

T° couleur Color T°	Optique Optic	Flux* Flux*	Puissance** Power**	500mA
2700K	NSP (12°)	1443lm	14.4W	F22.214.003.0
2700K	SP (24°)	1446lm	14.4W	F22.314.003.0
2700K	FL (30°)	1380lm	14.4W	F22.414.003.0
2700K	WFL (50°)	1254lm	14.4W	F22.514.003.0
3000K	NSP (12°)	1550lm	14.4W	F22.214.000.0
3000K	SP (24°)	1553lm	14.4W	F22.314.000.0
3000K	FL (30°)	1482lm	14.4W	F22.414.000.0
3000K	WFL (50°)	1347lm	14.4W	F22.514.000.0
4000K	NSP (12°)	1764lm	14.4W	F22.224.000.0
4000K	SP (24°)	1768lm	14.4W	F22.324.000.0
4000K	FL (30°)	1687lm	14.4W	F22.424.000.0
4000K	WFL (50°)	1533lm	14.4W	F22.524.000.0
RGB	NSP (12°)	193-371-136lm	14.4W	F22.2Y4.000.0
RGB	SP (24°)	196-376-138lm	14.4W	F22.3Y4.000.0
RGB	FL (30°)	191-367-135lm	14.4W	F22.4Y4.000.0
RGB	WFL (50°)	187-359-132lm	14.4W	F22.5Y4.000.0

*Flux en sortie produit / Net luminaire output
**Puissance max / Maximum power

Dimensions câbles / Cable dimensions	
Monochrome (500mA)	2 x 0.5 mm2 - Ø5.8mm
RGB	6 x 0.22 mm2 - Ø7mm



GEMINI MAX SPRING

9 LED



2024-00



T° couleur Color T°	Optique Optic	Flux* Flux*	Puissance** Power**	500mA
2700K	NSP (12°)	1443lm	14.4W	F23.214.003.0
2700K	SP (24°)	1446lm	14.4W	F23.314.003.0
2700K	FL (30°)	1380lm	14.4W	F23.414.003.0
2700K	WFL (50°)	1254lm	14.4W	F23.514.003.0
3000K	NSP (12°)	1550lm	14.4W	F23.214.000.0
3000K	SP (24°)	1553lm	14.4W	F23.314.000.0
3000K	FL (30°)	1482lm	14.4W	F23.414.000.0
3000K	WFL (50°)	1347lm	14.4W	F23.514.000.0
4000K	NSP (12°)	1764lm	14.4W	F23.224.000.0
4000K	SP (24°)	1768lm	14.4W	F23.324.000.0
4000K	FL (30°)	1687lm	14.4W	F23.424.000.0
4000K	WFL (50°)	1533lm	14.4W	F23.524.000.0
RGB	NSP (12°)	193-371-136lm	14.4W	F23.2Y4.000.0
RGB	SP (24°)	196-376-138lm	14.4W	F23.3Y4.000.0
RGB	FL (30°)	191-367-135lm	14.4W	F23.4Y4.000.0
RGB	WFL (50°)	187-359-132lm	14.4W	F23.5Y4.000.0

OPTIONS PRODUIT / Luminaire options	Référence
T° couleur LED / LED colour temperature	Sur demande / On request
Câble supplémentaire / Additional cable	T00.000.007.0
RAL spécial / Special RAL	Sur demande / On request
Connecteur IP68 / IP68 connector	T00.000.078.0
Kit connexion IP68 / IP68 connection kit	T00.000.000.0
Filtre strié / Blade filter	T00.000.023.0
Grille nid d'abeille / Honeycomb grid	T00.000.014.0
Verre dépoli / Frosted glass	T00.000.022.0
Verre polycarbonate / Polycarbonate glass	C00.000.016.0
Vis antivol / Anti-theft screw	T00.000.062.0
Système antivol / Anti-theft system	T00.000.021.0

*Flux en sortie produit / Net luminaire output
**Puissance max / Maximum power

Dimensions câbles / Cable dimensions	
Monochrome (500mA)	2 x 0.5 mm2 - Ø5.8mm
RGB	6 x 0.22 mm2 - Ø7mm