


GEMINI COB (2025-00)

Adjustable ground recessed COB LED luminaire

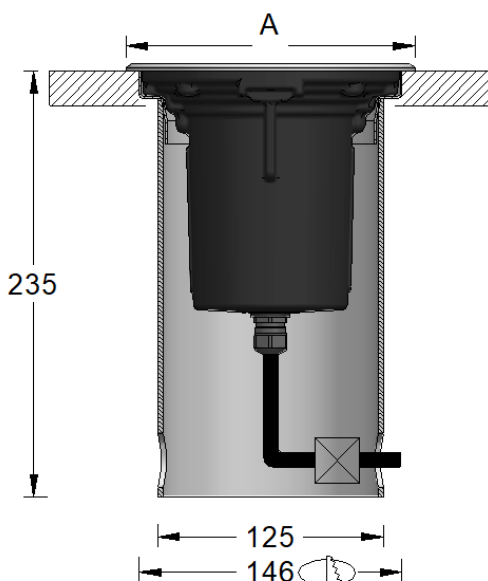

A = Ø 160mm (Recouvrant / Covering)
A = Ø 146mm (Arasant / Trimless)

. Material :	Body : cast treated Aluminium Anodized Aluminium - Stainless Steel 316L - Brass Tempered glass extra white	. Epoxy Paint :	Optional
. Fixing :	Recessed		
. LED Source :	1 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	1050lm (at 3000K-16°)	. Typ. Efficacy :	102lm/W
. CRI :	80+	. UV Resistance :	-
. Optic :	16° / 24° / 36°	. High pressure :	No
. Adjustable :	± 10°	. Water Resistance :	IP68
. Weight :	1.8Kg	. Impact :	IK09
. Dimensions :	Ø 146mm / Ø 160mm	. Static load :	1.1T
. Power supply :	230VAC	. Protection Class :	Class II / Class III
. Max Power :	10,8W	. Energy Class :	E
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Included or Remote
. Cables :	1ml standard AD8 - (2x1mm ² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		