


GEMINI ORIENTABLE (2025-00)

7 LED Adjustable ground recessed luminaire

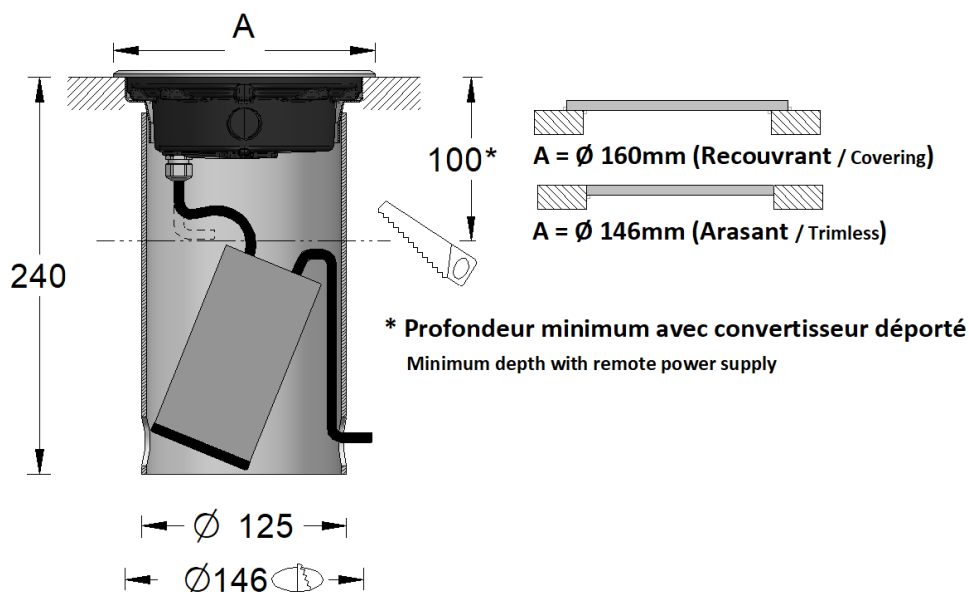

. Material :	Body : cast treated Aluminium Anodized Aluminium - Stainless steel 316L - Brass Tempered glass extra white	. Epoxy Paint :	Optional
. Fixing :	Recessed		
. LED Source :	7 LED 3 SDCM - L90B10 at 100.000hr 2700K / 3000K / 3500K / 4000K - Other possible temperatures.	. Operating T° :	-20°C/+40°C
. Color T° :	RGB(W)		
. Luminous flux :	1350lm (at 3000K-12°)	. Typ. Efficacy :	108lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)	. High pressure :	No
. Adjustable :	< 10°	. Water Resistance :	IP68
. Weight :	1.8Kg	. Impact :	IK09
. Dimensions :	Ø 146mm / 160mm	. Static load :	1.1T
. Power supply :	500mA / 230VAC	. Protection Class :	Class II / Class III
. Max Power :	13.8W	. Energy Class :	E
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver :	Included
. Cables :	1ml standard AD8 - (2x0.50mm ² black) - 1 Channel 3ml standard AD8 - (6(8)x0.22mm ² black) - 3(4) Channels		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		