
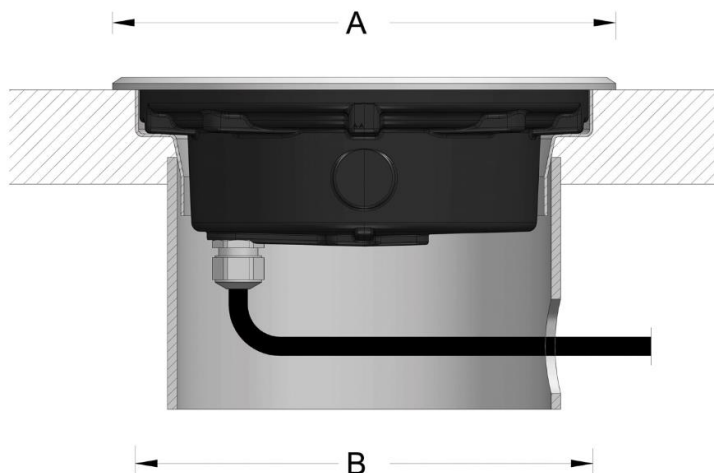


GEMINI VELVET (2025-00)

Ground recessed luminaire

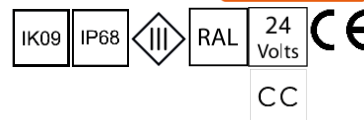

A = Ø160mm / □160mm
B = Ø146mm / □146mm

A = Ø146mm / □149mm
B = Ø146mm / □149mm

. Material :	Body : cast treated Aluminium	. Epoxy Paint :	Optional
	Anodized Aluminium - Stainless Steel 316L - Brass		
	Tempered glass extra white		
. Fixing :	Recessed		
. LED Source :	1 LED 3 SDCM	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	-	. Typ. Efficacy :	-
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Frosted	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP68
. Weight :	1.8Kg	. Impact :	IK09
. Dimensions :	Ø 146mm / Ø 160mm / □149mm / □160mm	. Static load :	1.1T
. Power supply :	500mA / 12-24VDC	. Protection Class :	Class III
. Max Power :	1.6W	. Energy Class :	-
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2x0.50mm ² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		