
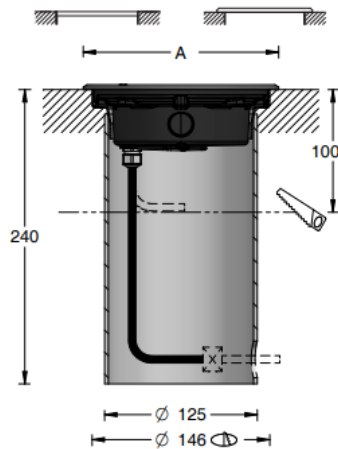


# GEMINI ASY

## Asymmetrical ground recessed luminaire



A = Ø 146mm (Trimless)

A = Ø 160mm (Covering)

\* Minimum depth with remote power supply

- . Material: Body in cast aluminium
- . Disc: Anodized Alum - Stainless steel 316L - Brass (Epoxy paint optional)  
Tempered glass extra white
- . Fixing : Recessed
- . LED Source : 4 LED 3-SDCM - L90B10@100.000hr
- . Color T° : 2700K / 3000K / 4000K - Other possible temperatures, contact us.
- . Product flux : 600lm (at 3000K-ASY\_232°)
- . Efficacy : 107lm/W
- . CRI : 80+ / 90+
- . Optic : Asymmetrical
- . Adjustable : No
- . Dimensions : Ø 146mm ou 160mm
- . Weight : 1.8Kg
- . Protection : IP68
- . Resistance : -
- . Impact : IK09
- . Static load : 1.1T
- . High pressure : No
- . Protection : Classe II / Classe III
- . Power : 6.4W / 6.9W / 5.8W
- . Power supply : 500mA / 24VDC / 230VAC
- . Driver : Remote
- . Control : On-Off / 1-10V\* / DALI\* / DMX\* (with adequate driver)  
\*Optional control through smartphone bluetooth CASAMBI
- . Cables : 1ml standard - (2x0.50mm<sup>2</sup> noir) – Monochrom
- . Energy class : E / F / G
- . Norms : NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . Warranty: 2 years standard