


GEMINI BOL

Ground recessed luminaire
with a «blade of light» effect

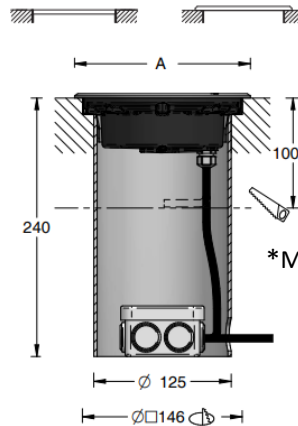

A = Ø 146mm (Trimless)

A = Ø 160mm (Covering)

*Minimum depth with remote power supply

- . Material: Body in anodized Aluminium (RAL on demand)
- . Disc: Anodized Aluminium - Stainless steel 316L - Brass
Tempered glass extra white
- . Fixing : Recessed
- . LED Source : COB LED / 1x4 LED - 3-SDCM – L90B10 @ 100.000hr

- . Color T° : 2700K / 3000K / 4000K - Other possible temperatures, contact us.
DynW / RGBW
- . Product flux : 67lm (at 2700K-12°)
- . Efficiency : 11lm/W
- . CRI : 80+ / 90+
- . Optic : WW(4°x170°)
- . Adjustable : No
- . Dimensions : Ø 146mm ou 160mm
- . Weight : 1.7 Kg

- . Protection : IP67
- . Impact : -
- . Static load : -
- . High pressure : No

- . Protection : Classe III
- . Power : 6.3W (monochrom) / 9W
- . Power supply : 500mA / 230VAC
- . Driver : Remote
- . Control : On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . Cables : 1ml standard - (2 x 0.5mm² noir) Monochrom
3ml standard – (4x0.22mm² noir) DynW / (8x0.22mm² noir) RGBW

- . Energy class : G
- . Norms : NF-EN 60529/60598-1-A1/60598-2-1/60598-2-3-A1/60598-2-5/62471
- . Warranty: 2 years standard