



LINA POWER (2025-00)

High-power linear spotlight

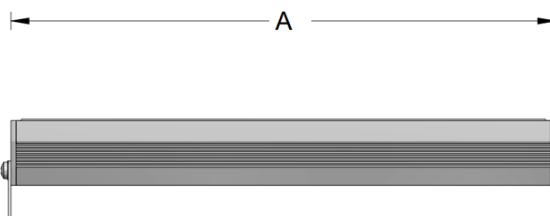

A = 328mm 614mm 900mm
 4LED 8LED 12LED



. Material :	Body : Anodized Aluminium	. Epoxy Paint :	Optional
	-		
	PMMA glass		
. Fixing :	Surface mounted		
. LED Source :	12 / 24 / 36 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2200K / 2700K / 3000K / 4000K - Other possible temperatures.		
	RGB / DynW		
. Luminous flux :	3000lm (at 12LED-3000K-12°)	. Typ. Efficacy :	129lm/W
. CRI :	70+ (2200K) / 80+ / 90+	. UV Resistance :	-
. Optic :	12° / 24° / 30° / 50° / WW(12x62°) / WW(24x62°)	. High pressure :	No
. Adjustable :	Yes	. Water Resistance :	IP67
. Weight :	0.7Kg / 1.1Kg / 1.6Kg	. Impact :	IK09
. Dimensions :	328mm (12 LED) / 614mm (24 LED) / 900mm (36 LED) x59mm	. Static load :	-
. Power supply :	700mA	. Protection Class :	Class III
. Max Power :	25W - 75W	. Energy Class :	E
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2x0.50mm ² black) / H07RNF (3G1 black - 75W) - 1 Channel 3ml standard AD8 - (4/6x0.22m ² black) - 2/3 Channels		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		