



LINA

Medium-power linear spotlight

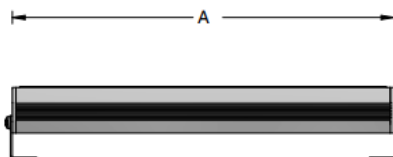

A =	328mm	614mm	900mm
	4LED	8LED	12LED

- . **Material:** Body in anodized Aluminium (Epoxy paint possible)
PMMA glass
- . **Fixing :** on Bracket
- . **LED Source :** 4 / 8 / 12 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
- . **Product flux :** 1600lm (at 3000K-4LED-12°)
- . **Efficacy :** 96lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / ASY / WW(12°x62°) / WW(24°x62°)
EL(21°x92°) / ASY_247
- . **Adjustable :** Yes
- . **Dimensions :** 328mm (4 LED) / 614mm (8 LED) / 900mm (12 LED) x 59mm
- . **Weight :** 0.66 Kg / 1.1 Kg / 1.6 Kg
- . **Protection :** IP67
- . **Impact :** IK09
- . **Static load :** -
- . **High pressure :** No
- . **Protection :** Classe III
- . **Power :** 18W (4 LED) / 36W (8 LED) / 54W (12 LED)
- . **Power supply :** 1400mA
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
* Smartphone bluetooth CASAMBI control option possible
- . **Cables :** 1ml standard - (2x0.50mm² noir)
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard