



LINA POWER

High-power linear spotlight

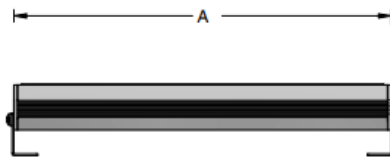

A =	328mm	614mm	900mm
	12LED	24LED	36LED

- . **Material:** Body in anodized Aluminium (Epoxy paint possible)
PMMA glass
- . **Fixing :** Surface mounted
- . **LED Source :** 12 / 24 / 36 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
RGB / DynW
- . **Product flux :** 3000lm (at 12LED-3000K-12°)
- . **Efficacy :** 129lm/W
- . **CRI :** 70+ (2200K) / 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / WW(12x62°) / WW(24x62°)
- . **Adjustable :** Yes
- . **Dimensions :** 328mm (12 LED) / 614mm (24 LED) / 900mm (36 LED) x 59mm
- . **Weight :** 0.66 Kg / 1.1 Kg / 1.6 Kg
- . **Protection :** IP67
- . **Impact :** IK09
- . **Static load :** -
- . **High pressure :** No
- . **Protection :** Classe III
- . **Power :** 25W (12 LED) / 50W (24 LED) / 75W (36 LED)
- . **Voltage :** 700mA
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
* Smartphone bluetooth CASAMBI control option possible
- . **Cables :** 1ml standard (2x0.50mm² noir / 3x1mm² noir) - Monochrome
3ml standard (6x0.22m² noir) – RGB
- . **Energy class :** E
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard