


LT-LINE PROJECTEUR (2025-00)

Surface mounted luminaire

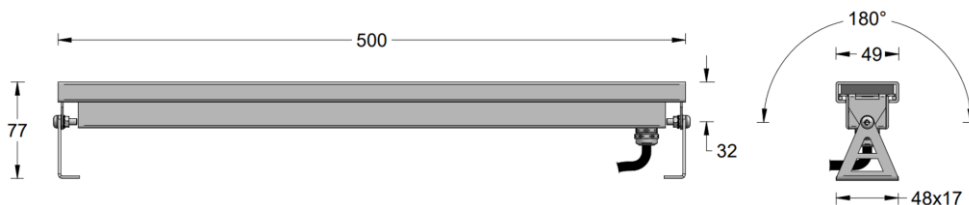

. Material :	Body : Stainless Steel 316L	. Epoxy Paint :	Optional
	-		
	Tempered glass extra white		
. Fixing :	Surface mounted		
. LED Source :	12 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures. RGB		
. Luminous flux :	2250lm (at 3000K-12°)	. Typ. Efficacy :	136lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	12°/24°/30°/50° / EL(21°x92°) / WW(12°x62°)/ WW(24°x62°)	. High pressure :	No
. Adjustable :	Yes	. Water Resistance :	IP67
. Weight :	1.9Kg	. Impact :	IK09
. Dimensions :	500mmx77mm	. Static load :	-
. Power supply :	500mA	. Protection Class :	Class III
. Max Power :	19.2W	. Energy Class :	D
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2x0.50mm ² black) - 1 Channel 3ml standard AD8 - (6x0.22mm ² black) - 3 Channels		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		