


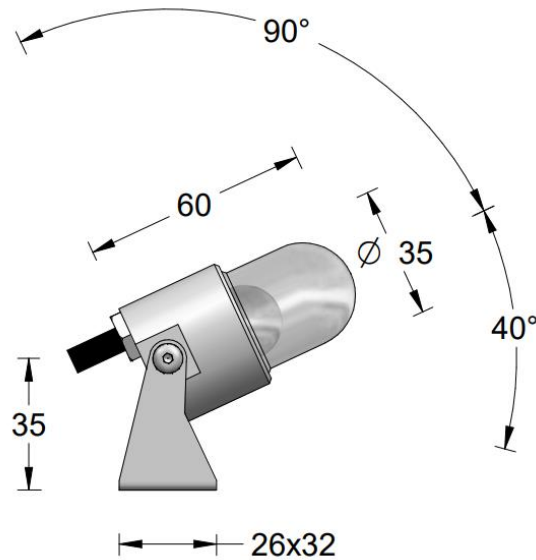

. Material :	Body : Anodized Aluminium	. Epoxy Paint :	Optional
	-		
	Frosted PMMA glass		
. Fixing :	Surface mounted		
. LED Source :	1 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures. RGBW		
. Luminous flux :	64lm (at 3000K)	. Typ. Efficacy :	53lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Frosted	. High pressure :	No
. Adjustable :	Yes	. Water Resistance :	IP68
. Weight :	0.2kg	. Impact :	IK09
. Dimensions :	Ø35mmx35mmx60mm	. Static load :	-
. Power supply :	350mA / 12-24VDC	. Protection Class :	Class III
. Max Power :	1.2W - 1.5W	. Energy Class :	G
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2x0.22mm² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		