
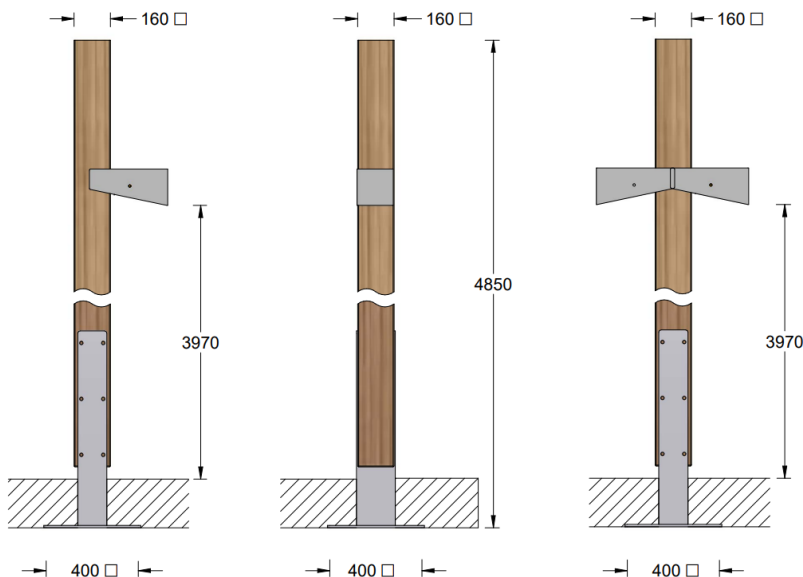




|                   |                                                         |                      |                                   |
|-------------------|---------------------------------------------------------|----------------------|-----------------------------------|
| . Material :      | Wood and Steel structure                                | . Epoxy Paint :      | Optional                          |
| -                 |                                                         |                      |                                   |
| -                 |                                                         |                      |                                   |
| . Fixing :        | On ground                                               |                      |                                   |
| . LED Source :    | Projecteur GEMINI-III ASY                               | . Operating T° :     | -20°C/+40°C                       |
| . Color T° :      | 2700K / 3000K / 4000K - Other possible temperatures.    |                      |                                   |
| . Luminous flux : | Depending on the chosen spotlight                       | . Typ. Efficacy :    | Depending on the chosen spotlight |
| . CRI :           | 80+ / 90+                                               | . UV Resistance :    | -                                 |
| . Optic :         | Depending on the chosen spotlight                       | . High pressure :    | No                                |
| . Adjustable :    | Yes                                                     | . Water Resistance : | -                                 |
| . Weight :        | -                                                       | . Impact :           | -                                 |
| . Dimensions :    | □160mm (Fixing height of spotlight = 4m)                | . Static load :      | -                                 |
| . Power supply :  | 230VAC                                                  | . Protection Class : | Class II                          |
| . Max Power :     | Depending on the chosen spotlight                       | . Energy Class :     | Depending on the chosen spotlight |
| . Control :       | On-Off / 1-10V / DALI (with adequate driver)            | . Driver :           | Included                          |
| . Cables :        | Depending on the chosen spotlight                       |                      |                                   |
| . Norms :         | NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471 |                      |                                   |
| . Warranty :      | 2 years standard (extendable to 5 years on demand)      |                      |                                   |