



MICRO LINE (2025-00)

Thin linear spotlight

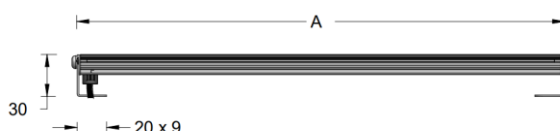

. Material :	Body : Anodized Aluminium	. Epoxy Paint :	Optional
	-		
	Full silicone encapsulation		
. Fixing :	Surface mounted		
. LED Source :	9 / 18 / 27 / 36 / 45 / 54 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures. DynW / RGBW		
. Luminous flux :	520lm (3000K-9LED) – 3120lm (4000K-54LED)	. Typ. Efficacy :	115lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	120°	. High pressure :	No
. Adjustable :	Yes	. Water Resistance :	IP68
. Weight :	0.2Kg/0.6Kg	. Impact :	-
. Dimensions :	300mm/600mm/900mmx30mm	. Static load :	-
. Power supply :	500mA	. Protection Class :	Class III
. Max Power :	5W – 30W	. Energy Class :	E
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2/4/6x0.22mm ² black) - 1/2/3 Channels		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		