
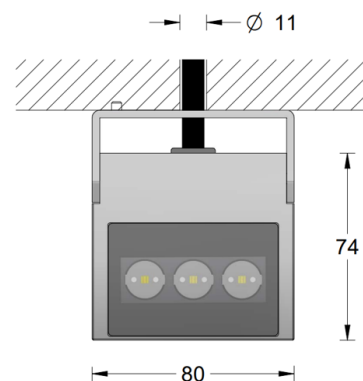
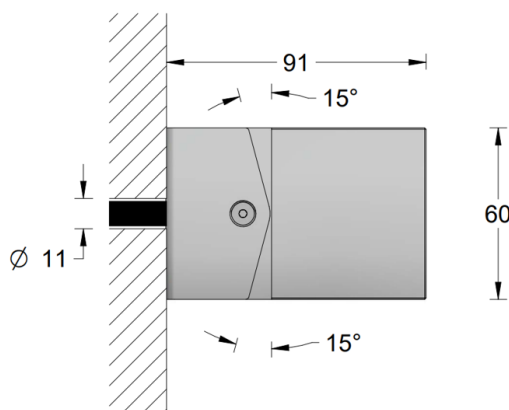


MURO-1D (2025-00)




Adjustable wall fixture



. Material :	Body : Anodized Aluminium	. Epoxy Paint :	Optional
	-		
	Tempered glass extra white		
. Fixing :	Surface mounted		
. LED Source :	3 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	520lm (at 3000K-12°)	. Typ. Efficacy :	124lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°) / ASY_232	. High pressure :	No
. Adjustable :	± 15°	. Water Resistance :	IP67
. Weight :	0.7Kg	. Impact :	-
. Dimensions :	91mmx80mmx60mm	. Static load :	-
. Power supply :	500mA / 12-24VDC / 230VAC	. Protection Class :	Class III
. Max Power :	4.8W - 5.4W	. Energy Class :	D / E / F
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2x0.50mm ² black (500mA/12-24VDC)) 1ml standard H07RNF - (3G1 black (230VAC))		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		

MURO-2D (2025-00)

Adjustable wall fixture

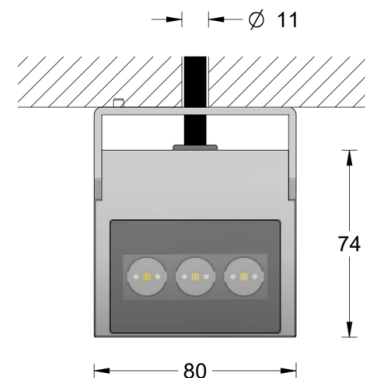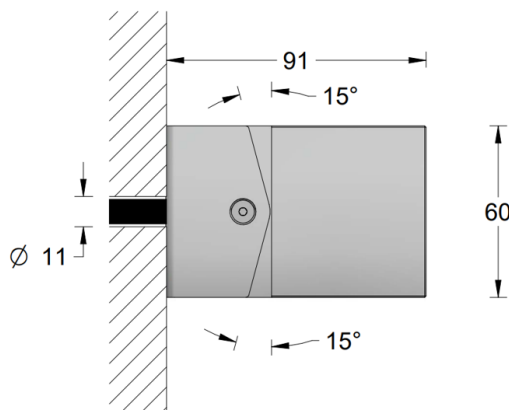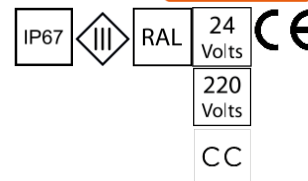

. Material :	Body : Anodized Aluminium	. Epoxy Paint :	Optional
	-		
	Tempered glass extra white		
. Fixing :	Surface mounted		
. LED Source :	3 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	1000lm (at 3000K-12°)	. Typ. Efficacy :	119lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°) / ASY_232	. High pressure :	No
. Adjustable :	± 15°	. Water Resistance :	IP67
. Weight :	0.7Kg	. Impact :	-
. Dimensions :	91mmx80mmx60mm	. Static load :	-
. Power supply :	500mA / 12-24VDC / 230VAC	. Protection Class :	Class III
. Max Power :	8.4W - 10.8W	. Energy Class :	E
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2x0.50mm ² black (500mA/12-24VDC)) 1ml standard H07RNF - (3G1 black (230VAC))		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		