
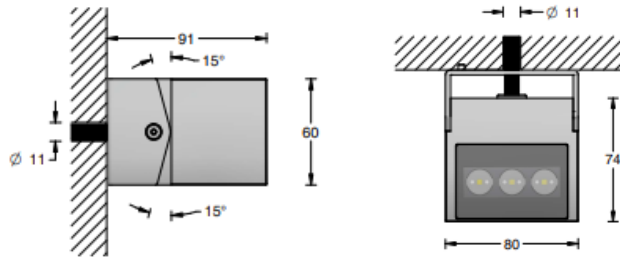


# MURO-1D


Adjustable wall fixture  
1 direction



- . **Material:** Body in anodized Aluminium (Epoxy paint possible)  
Tempered glass extra white
- . **Fixing :** Wall
- . **LED Source :** 3 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
- . **Product flux :** 520lm (at 3000K-12°)
- . **Efficacy :** 124lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°) / ASY\_232
  
- . **Adjustable :** ± 15°
- . **Dimensions :** 91mm x 80mm x 60mm
- . **Weight :** 0.700Kg
  
- . **Protection :** IP67
- . **Impact :** -
- . **Static load :** -
- . **High pressure :** No
  
- . **Protection :** Classe III
- . **Power :** 4.8W / 5.4W
- . **Power supply :** 500mA / 12-24VDC / 230VAC
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V\* / DALI\* (with adequate driver)  
\*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (2x0.5mm<sup>2</sup> noir(500mA/12-24VDC)) – Monochrome  
1ml standard - (3x0.75mm<sup>2</sup> noir(230VAC)) - Monochrome
  
- . **Energy class:** D / E / F
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard

# MURO-2D

Adjustable wall fixture  
2 directions

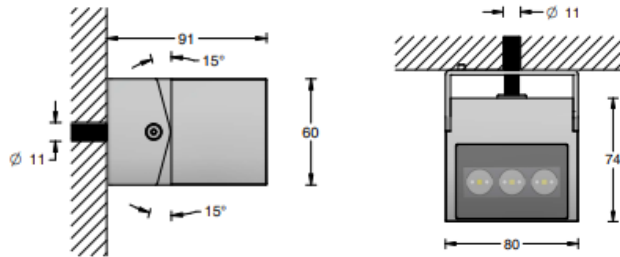

- . **Material:** Body in anodized Aluminium (Epoxy paint possible)  
Tempered glass extra white
- . **Fixing :** Wall
- . **LED Source :** 2x 3 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
- . **Product flux :** 1000lm (at 3000K-12°)
- . **Efficacy :** 119lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°) / ASY\_232
  
- . **Adjustable :** ± 15°
- . **Dimensions :** 91mm x 80mm x 60mm
- . **Weight :** 0.700Kg
  
- . **Protection :** IP67
- . **Impact :** -
- . **Static load :** -
- . **High pressure :** No
  
- . **Protection :** Classe III
- . **Power :** 9.6W / 10.8W / 8.4W
- . **Power supply :** 500mA / 12-24VDC / 230VAC
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V\* / DALI\* (with adequate driver)  
\*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (2x0.5mm<sup>2</sup> noir(500mA/12-24VDC)) – Monochrome  
1ml standard - (3x0.75mm<sup>2</sup> noir(230VAC)) – Monochrome
  
- . **Energy class:** E
  
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard