
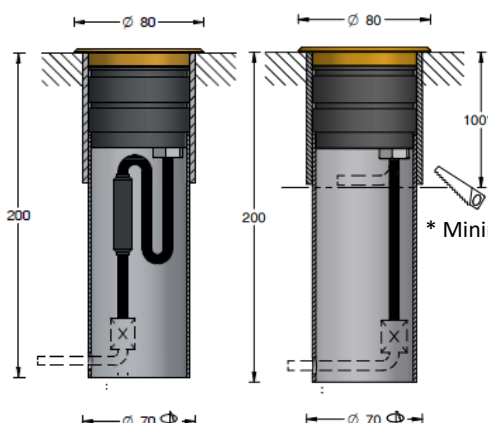


NAOS

Ground recessed luminaire (without visible screws)



* Minimum depth with remote power supply

- . **Material:** Body in anodized Aluminium
Anodized aluminium - Stainless steel 316L - Brass
- . **Fixing :** Tempered glass extra white
Ground recess
- . **LED Source :** 1 LED 3-SDCM - L90B10@100.000hr
1x4 LED 3-SDCM - L70B10@50.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
DynW / RGBNW
- . **Product flux :** 330lm (at 3000K-6°)
- . **Efficacy :** 107lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 6° / WW(6°x62°) / 9° / 23° / 32° / WW(9°x62°) / WW (23°x62°)
- . **Adjustable :** No
- . **Dimensions :** Ø80mm
- . **Weight :** 0.400Kg
- . **Protection :** IP67
- . **Impact :** IK09
- . **Static load :** 2T
- . **High pressure :** No
- . **Protection :** Classe III
- . **Power :** 3.4W / 4.2W(monochrome)
6W / 6.5W (DynW - RGBNW)
- . **Power supply :** 1050mA / 500mA / 12-24VDC
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard (2x0.50mm² noir) - Monochrome
3ml standard (4/8x0.22mm² noir) - DynW / RGBNW
- . **Energy class:** E / G
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard