
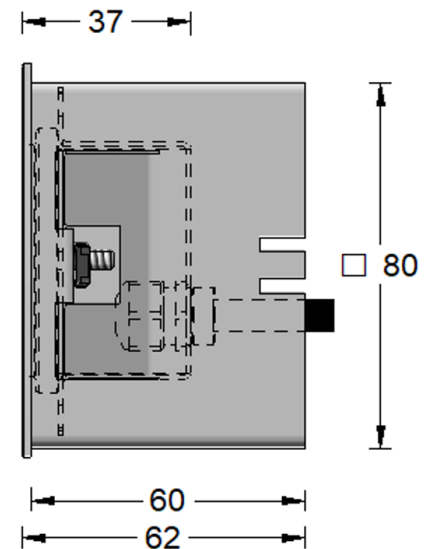


QUADRO MINI (2025-00)


1 LED Asymmetrical square recessed luminaire

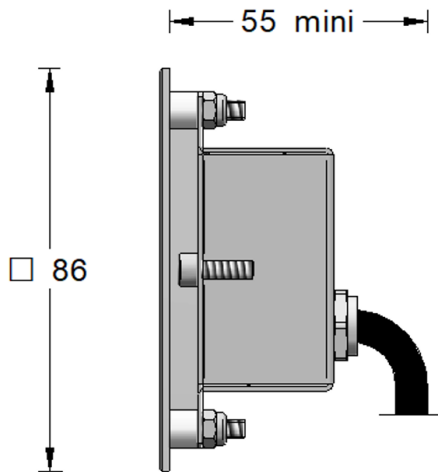

. Material :	Body : Stainless Steel 316L Stainless Steel 316L - Brass Tempered glass extra white	. Epoxy Paint : Optional
. Fixing :	Wall - ground recessed	
. LED Source :	1 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° : -20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.	
. Luminous flux :	133lm (at 3000K-Asy_clair)	. Typ. Efficacy : 95lm/W
. CRI :	80+ / 90+	. UV Resistance : -
. Optic :	Asymmetrical	. High pressure : No
. Adjustable :	No	. Water Resistance : IP68
. Weight :	0.3Kg	. Impact : IK09
. Dimensions :	□86mmx62mm	. Static load : 1.5T
. Power supply :	500mA / 12-24VDC	. Protection Class : Class III
. Max Power :	1.6W - 2.1W	. Energy Class : F / G
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver : Remote
. Cables :	1ml standard AD8 - (2x0.50mm² black) - 1 Channel	
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471	
. Warranty :	2 years standard (extendable to 5 years on demand)	

QUADRO MINI SPRING (2025-00)

1 LED Asymmetrical square recessed luminaire

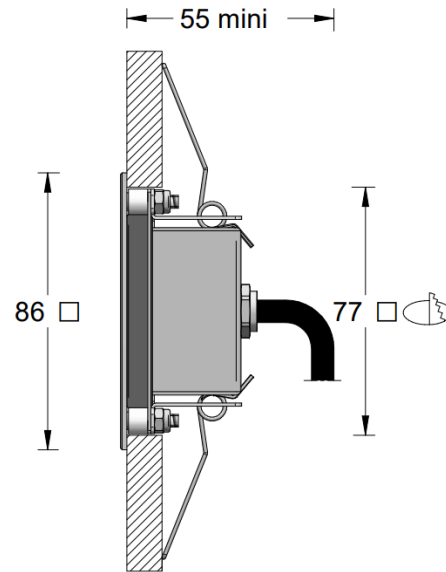

. Material :	Body : Stainless Steel 316L Stainless Steel 316L - Brass Tempered glass extra white	. Epoxy Paint :	Optional
. Fixing :	Recessed luminaire (hollow partition)		
. LED Source :	1 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	133lm (at 3000K-Asy_clair)	. Typ. Efficacy :	95lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Asymmetrical	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP68
. Weight :	0.3Kg	. Impact :	IK09
. Dimensions :	□86mmx60mm	. Static load :	1.5T
. Power supply :	500mA / 12-24VDC	. Protection Class :	Class III
. Max Power :	1.6W - 2.1W	. Energy Class :	F / G
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2x0.50mm ² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		