


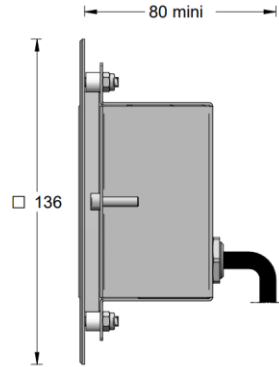


QUADRO OSTAR (2025-00)



Asymmetrical square recessed luminaire

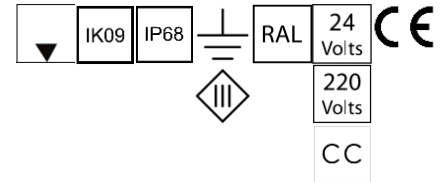

. Material :	Body : Stainless Steel 316L Stainless Steel 316L - Brass Tempered glass extra white	. Epoxy Paint :	Optional
. Fixing :	Wall - ground recessed		
. LED Source :	1x4 LED / 3 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures. DynW / RGBNW		
. Luminous flux :	520lm (at 3000K-12°)	. Typ. Efficacy :	124lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	ASY_12° / ASY_24° / ASY_30° / ASY_50°	. High pressure :	No
. Adjustable :	No - Preoriented 8°	. Water Resistance :	IP68
. Weight :	0.8Kg	. Impact :	IK09
. Dimensions :	136mmx72mm	. Static load :	1.5T
. Power supply :	500mA / 12-24VDC / 230VAC	. Protection Class :	Class I / Class III
. Max Power :	4W - 5.4W	. Energy Class :	D / F / E
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver :	Included (230VAC) Remote
. Cables :	1ml standard H07RNF - (3G1 black) - 230VAC 1ml standard AD8 - (2x0.75mm² black) - 500mA 3ml standard AD8 - (4/8x0.22mm² black) - DynW / RGBW		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		

QUADRO OSTAR SPRING (2025-00)

Asymmetrical square recessed luminaire

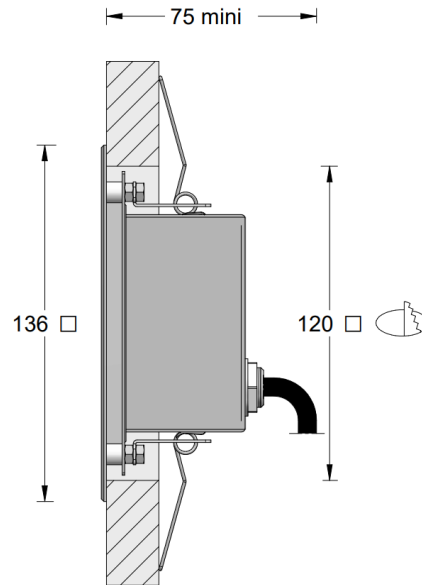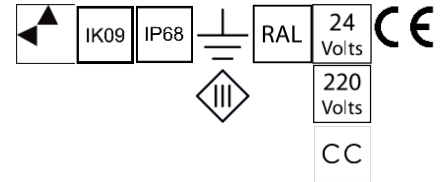

. Material :	Body : Stainless Steel 316L Stainless Steel 316L - Brass Verre trempé extra blanc	. Epoxy Paint :	Optional
. Fixing :	Recessed luminaire (hollow partition)		
. LED Source :	1x4 LED / 3 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures. DynW / RGBNW		
. Luminous flux :	520lm (at 3000K-12°)	. Typ. Efficacy :	124lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	ASY_12° / ASY_24° / ASY_30° / ASY_50°	. High pressure :	No
. Adjustable :	No - Preoriented 8°	. Water Resistance :	IP68
. Weight :	0.8Kg	. Impact :	IK09
. Dimensions :	□136mmx75mm	. Static load :	1.5T
. Power supply :	500mA / 12-24VDC / 230VAC	. Protection Class :	Class I / Class III
. Max Power :	4W - 5.4W	. Energy Class :	D / F / E
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver :	Included (230VAC) Remote
. Cables :	1ml standard H07RNF - (3G1 black) - 230VAC 1ml standard AD8 - (2x0.75mm² black) - 500mA 3ml standard AD8 - (4/8x0.22mm² black) - DynW / RGBW		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		