
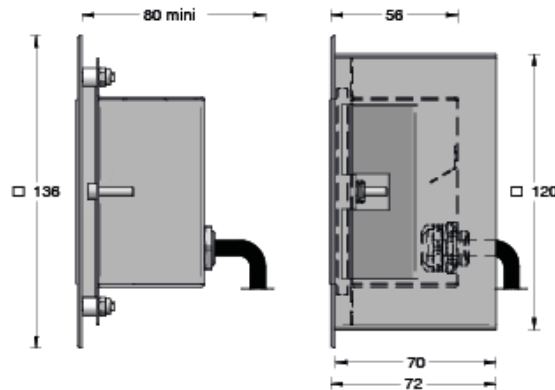


# QUADRO OSTAR

Recessed luminaire pre-oriented 8°



- . **Material:** Body in Stainless Steel 316L  
Stainless Steel 316L - Brass  
Tempered glass extra white
- . **Fixing :** Wall or ground recess
- . **LED Source :** 1x4 LED / 3 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.  
DynW / RGBNW
- . **Product flux :** 520lm (at 3000K-12°)
- . **Efficacy :** 124lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** ASY\_12° / ASY\_24° / ASY\_30° / ASY\_50°
- . **Adjustable :** No
- . **Dimensions :** □ 136mm x 75mm
- . **Weight :** 0.80Kg
- . **Protection :** IP67
- . **Impact :** IK09
- . **Static load :** 1.5T
- . **High pressure :** No
- . **Protection :** Classe I / Classe III
- . **Power :** 4.8W / 4W / 5.4W
- . **Power supply :** 500mA / 240 VAC / 12-24VDC
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V\* / DALI\* / DMX\* (with adequate driver)  
\*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard (3x1mm<sup>2</sup> noir) - Monochrome  
3ml standard (4/8x0.22mm<sup>2</sup> noir) - DynW / RGBW
- . **Energy class:** D / E / F
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard