


RAMBARDE (2025-00)

Linear fixture for fitting in guard-rail

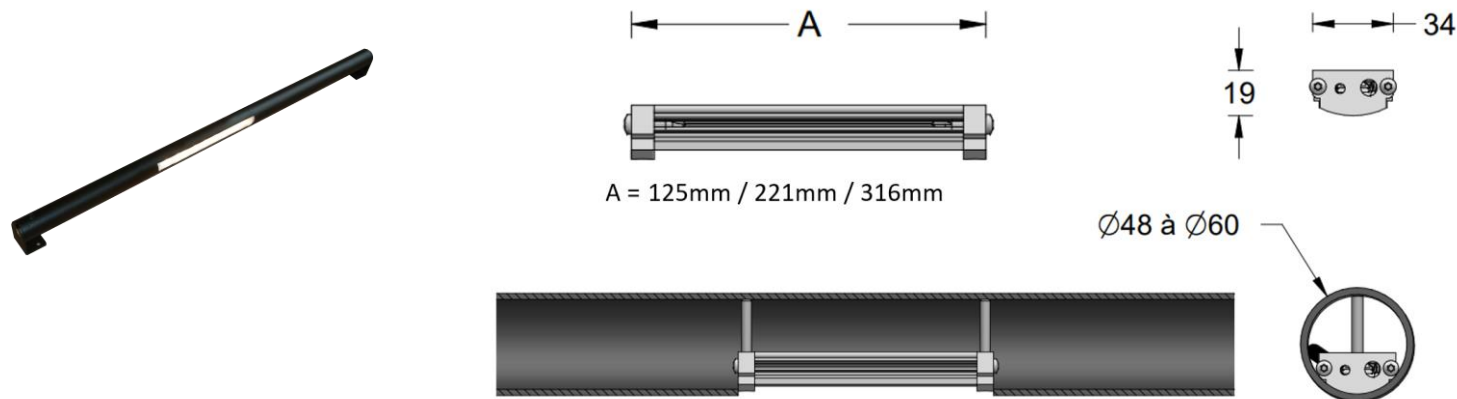

. Material :	Body : Anodized Aluminium	. Epoxy Paint :	Optional
	-		
	Verre en PMMA		
. Fixing :	Mechanical, non-intrusive, theft & vibration-proof inside handrail		
. LED Source :	3 / 6 / 9 LED 3 SDCM - L90B10 at 50.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	130lm – Low Power (at 3000K-3LED-Asy_260) 278lm – High Power (at 3000K-3LED-Asy_260)	. Typ. Efficacy :	87lm/W / 73lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Special Asymmetrical	. High pressure :	No
. Adjustable :	Remote	. Water Resistance :	IP65
. Weight :	0.1kg / 0.2kg	. Impact :	-
. Dimensions :	125mm / 221mm / 316mmx34mmx19mm	. Static load :	-
. Power supply :	24VDC	. Protection Class :	Class III
. Max Power :	1.5W - 4.5W - LP 3.8W - 11W - HP	. Energy Class :	F / G
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	2x0.5ml standard AD8 - (2x0.75mm ² black)		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		