


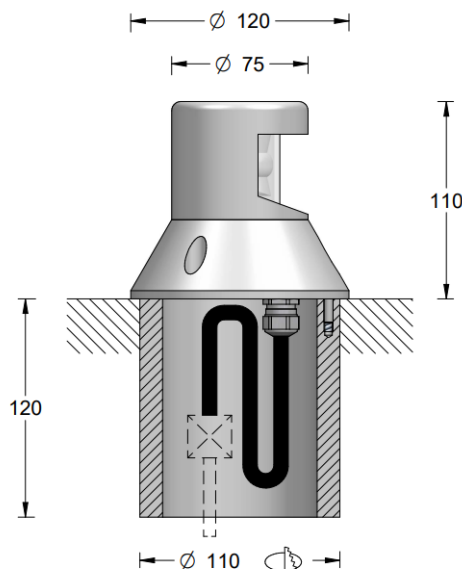

. Material :	Body : Anodized Aluminium	. Epoxy Paint :	Optional
	-		
	Verre en PMMA		
. Fixing :	On ground		
. LED Source :	1 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	239lm (at 3000K)	. Typ. Efficacy :	75lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	EL(14°x99°)	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP67
. Weight :	0.7Kg	. Impact :	IK10
. Dimensions :	Ø120mmx110mm	. Static load :	-
. Power supply :	230VAC	. Protection Class :	Class I
. Max Power :	3.3W	. Energy Class :	G
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Included
. Cables :	1ml standard H07RNF - (3G1 black)		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		