


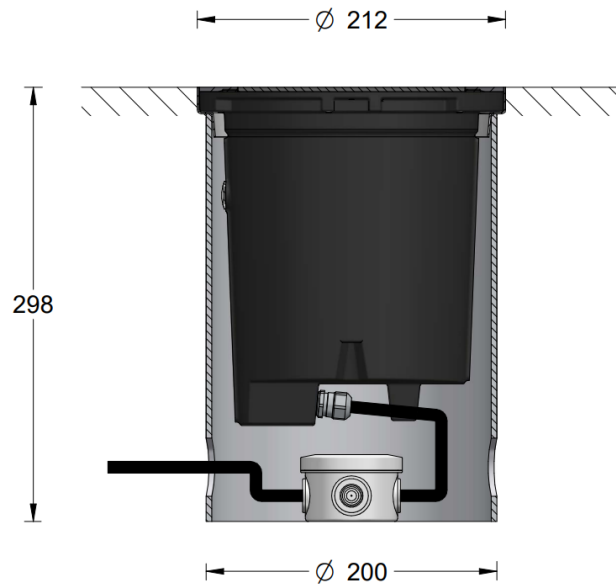

. Material :	Body : Anodized and treated cast Aluminium	. Epoxy Paint :	Optional
	Disk - Stainless Steel 316L		
	Verre trempé extra blanc		
. Fixing :	Ground recessed		
. LED Source :	16 LED 3-SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K / DynW / RGBW (Other CCT on demand)		
. Luminous flux :	3070lm (at 3000K-12°)	. Typ. Efficacy :	120 lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	12°/ 24°/ 30°/ 50°/ WW(12°x62°)/ WW(24°x62°)	. High pressure :	No
. Adjustable :	Yes	. Water Resistance :	IP67
. Weight :	7Kg	. Impact :	IK09
. Dimensions :	Ø 212mmx232mm	. Static load :	1.5T
. Power supply :	230VAC	. Protection Class :	Class II
. Max Power :	28.5W	. Energy Class :	E
. Control :	On-Off / 1-10V / DALI / DMX (with adequate driver)	. Driver :	Included
. Cables :	1ml standard AD8 - (2x0.75mm ² black) - On-Off 2x1ml standard AD8 - (4x0.22mm ² black) + (2x0.75mm ² black) - DALI / DMX		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		