
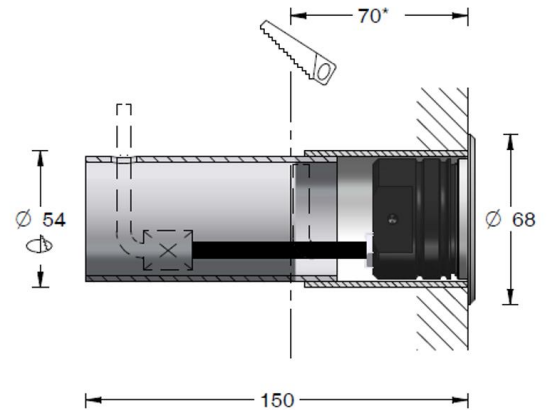


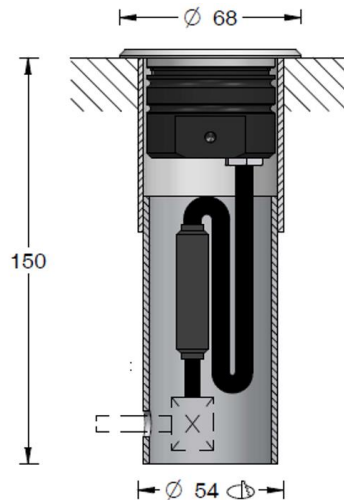

* Profondeur minimum avec convertisseur déporté
Minimum depth with remote power supply

. Material :	Body : Anodized Aluminium Anodized Aluminium - Stainless steel 316L - Brass Tempered glass extra white	. Epoxy Paint :	Optional
. Fixing :	Recessed		
. LED Source :	1 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.	. Typ. Efficacy :	108lm/W
. Luminous flux :	430lm (at 3000K-ASY_12°)	. UV Resistance :	-
. CRI :	80+ / 90+	. High pressure :	No
. Optic :	ASY_12° / ASY_24° / ASY_30° / ASY_WW(12°x62°) / ASY_WW(24°x62°) / ASY_172 / ASY_224 / WW(ASY_172)	. Water Resistance :	IP68
. Adjustable :	No	. Impact :	IK09
. Weight :	0.2Kg	. Static load :	3T
. Dimensions :	Ø68mm	. Protection Class :	Class III
. Power supply :	1400mA / 12-24VDC	. Energy Class :	E / F
. Max Power :	3.8W - 4.5W	. Driver :	Remote
. Control :	On-Off / 1-10V / DALI (with adequate driver)		
. Cables :	1ml standard AD8 - (2x0.50mm ² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		