
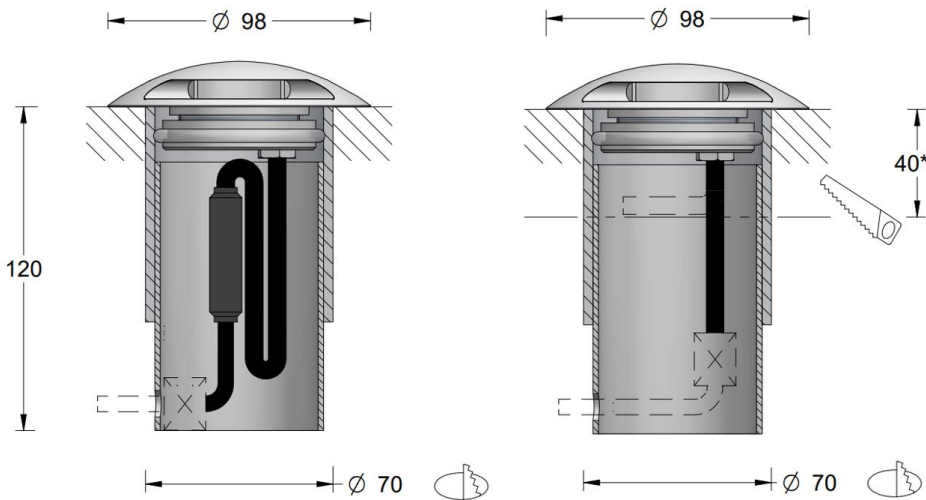


**VEGA BALISE MAXI** (2025-00)  
Ground recessed luminaire for beaconing (large beacon)

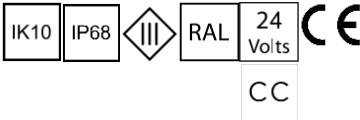

\* Profondeur minimum avec convertisseur déporté  
Minimum depth with remote power supply

|                   |                                                              |                      |             |
|-------------------|--------------------------------------------------------------|----------------------|-------------|
| . Material :      | Body : Stainless Steel 316L                                  | . Epoxy Paint :      | Optional    |
|                   | Stainless Steel 316L                                         |                      |             |
|                   | Tempered glass extra white                                   |                      |             |
| . Fixing :        | Ground recessed                                              |                      |             |
| . LED Source :    | 1 LED 3 SDCM - L90B10 at 100.000hr                           | . Operating T° :     | -20°C/+40°C |
| . Color T° :      | 2700K / 3000K / 4000K - Other possible temperatures.         |                      |             |
| . Luminous flux : | 41lm - 103lm (at 3000K)                                      | . Typ. Efficacy :    | 21lm/W      |
| . CRI :           | 80+ / 90+                                                    | . UV Resistance :    | -           |
| . Optic :         | Beacon (Clear glass)                                         | . High pressure :    | No          |
| . Adjustable :    | No                                                           | . Water Resistance : | IP68        |
| . Weight :        | 0.6Kg                                                        | . Impact :           | IK10        |
| . Dimensions :    | Ø98mm                                                        | . Static load :      | 4T          |
| . Power supply :  | 700mA / 12-24VDC                                             | . Protection Class : | Class III   |
| . Max Power :     | 2.3W - 2.9W                                                  | . Energy Class :     | G           |
| . Control :       | On-Off / 1-10V / DALI (with adequate driver)                 | . Driver :           | Remote      |
| . Cables :        | 1ml standard AD8 - (2x0.50mm <sup>2</sup> black) - 1 Channel |                      |             |
| . Norms :         | NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471      |                      |             |
| . Warranty :      | 2 years standard (extendable to 5 years on demand)           |                      |             |