
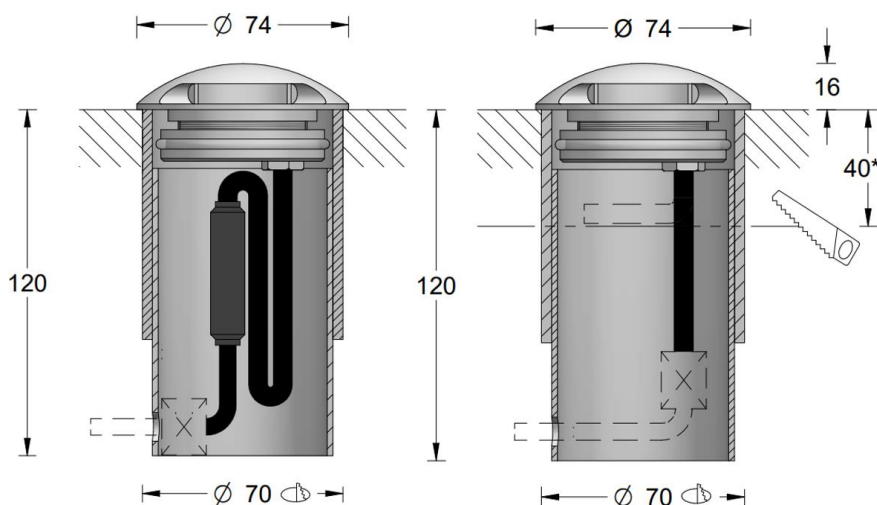
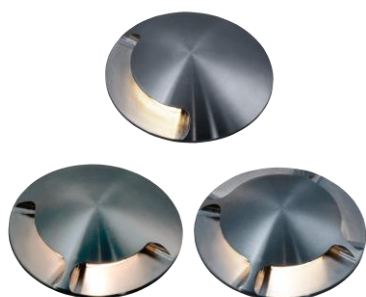


VEGA BALISE (2025-00)

Ground recessed luminaire for beaconing (medium beacon)

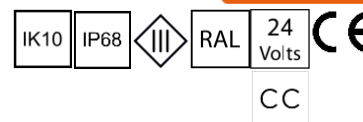

* Profondeur minimum avec convertisseur déporté
Minimum depth with remote power supply

. Material :	Body : Stainless Steel 316L Stainless Steel 316L - Brass Tempered glass extra white	. Epoxy Paint :	Optional
. Fixing :	Ground recessed		
. LED Source :	1 LED 3 SDCM - L90B10 at 100.000hr	. Operating T° :	-20°C/+40°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures.		
. Luminous flux :	41lm - 103lm (at 3000K)	. Typ. Efficacy :	21lm/W
. CRI :	80+ / 90+	. UV Resistance :	-
. Optic :	Beacon (Clear glass)	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP68
. Weight :	0.5Kg	. Impact :	IK10
. Dimensions :	Ø74mm	. Static load :	4T
. Power supply :	700mA / 12-24VDC	. Protection Class :	Class III
. Max Power :	2.3W - 2.9W	. Energy Class :	G
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	1ml standard AD8 - (2x0.50mm ² black) - 1 Channel		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		