
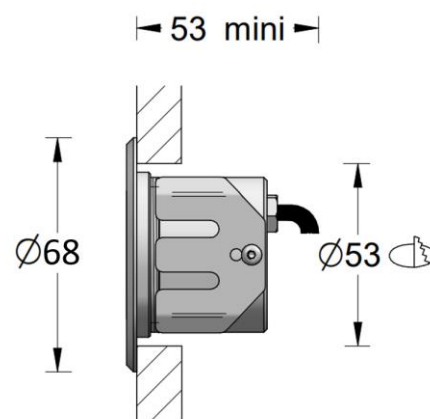


# VEGA SPRING (2025-00)

Ceiling recessed luminaire

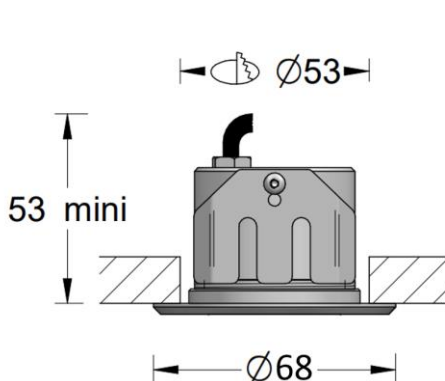

|                          |                                                              |                             |             |
|--------------------------|--------------------------------------------------------------|-----------------------------|-------------|
| . <b>Material :</b>      | Body : Anodized Aluminium - Stainless Steel 316L - Brass     | . <b>Epoxy Paint :</b>      | Optional    |
|                          | -                                                            |                             |             |
|                          | Tempered glass extra white                                   |                             |             |
| . <b>Fixing :</b>        | Recessed luminaire (hollow partition)                        |                             |             |
| . <b>LED Source :</b>    | 3 LED 3 SDCM - L90B10 at 100.000hr                           | . <b>Operating T° :</b>     | -20°C/+40°C |
| . <b>Color T° :</b>      | 2700K / 3000K / 4000K - Other possible temperatures.         |                             |             |
| . <b>Luminous flux :</b> | 520lm (at 3000K-12°)                                         | . <b>Typ. Efficacy :</b>    | 124lm/W     |
| . <b>CRI :</b>           | 80+ / 90+                                                    | . <b>UV Resistance :</b>    | -           |
| . <b>Optic :</b>         | 12° / 24° / 30° / 50°                                        | . <b>High pressure :</b>    | No          |
| . <b>Adjustable :</b>    | No                                                           | . <b>Water Resistance :</b> | IP68        |
| . <b>Weight :</b>        | 0.2Kg                                                        | . <b>Impact :</b>           | IK09        |
| . <b>Dimensions :</b>    | Ø68mmx53mm                                                   | . <b>Static load :</b>      | -           |
| . <b>Power supply :</b>  | 350mA / 500mA / 12-24VDC                                     | . <b>Protection Class :</b> | Class III   |
| . <b>Max Power :</b>     | 3.4W - 5.4W                                                  | . <b>Energy Class :</b>     | D / E       |
| . <b>Control :</b>       | On-Off / 1-10V / DALI (with adequate driver)                 | . <b>Driver :</b>           | Remote      |
| . <b>Cables :</b>        | 1ml standard AD8 - (2x0.50mm <sup>2</sup> black) - 1 Channel |                             |             |
| . <b>Norms :</b>         | NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471      |                             |             |
| . <b>Warranty :</b>      | 2 years standard (extendable to 5 years on demand)           |                             |             |