
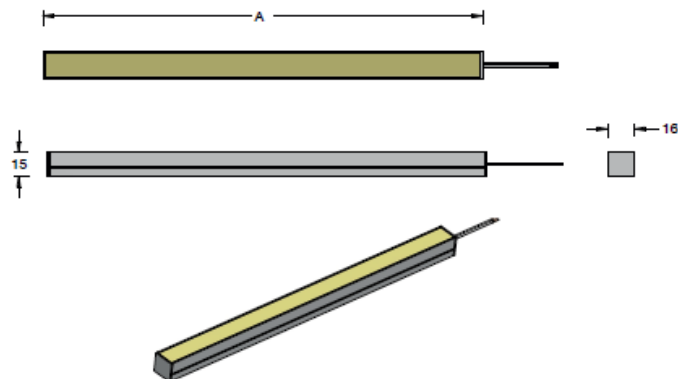


# LTM-LINE

Modular Linear LED line for outdoor use



- . **Material :** Aluminum, polyurethane
- . **Fixing :** Mechanical clips
- . **Source :** 3 SDCM – L70B50 @ 50.000h
- . **Colour T° :** 2700K / 3000K / 3500K / 4000K - Other possible temperatures, contact us.  
RGB
- . **Product Flux :** 170 – 710lm/m (3000K)
- . **Efficacy :** 35 – 37lm/W
- . **CRI :** 80+ / 90+ / 98+
- . **Optic :** 112°
- . **Colour T° :** -35°C to +50°C
- . **Adjustable :** No
- . **Dimensions :** 15mm x 16mm (L<sub>max</sub> = 3m)
- . **Weight :** -
- . **Protection :** IP67
- . **Resistant :** UV
- . **Impact :** -
- . **Static Load :** -
- . **High Pressure :** No
- . **Protection :** Classe III
- . **Power :** 4.8W/ml - 19,2 W/ml
- . **Power supply :** 24VDC
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V\* / DALI\* / DMX\* (with adequate driver)  
\*Optional control through smartphone bluetooth CASAMBI
- . **Cable :** 150mm – 2000mm
- . **Energy class :** G
- . **Norms :** EN 62031 / ETL
- . **Warranty :** 2 years standard