
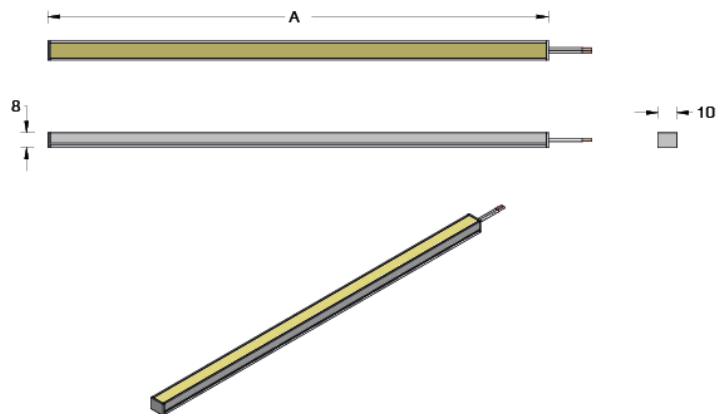


LTS-LINE

Small modular linear LED line for outdoor use



. Material :	Aluminum, polyurethane
. Fixing :	Thermal conductive adhesive tape
. Source :	3 SDCM – L70B50 @ 50.000h
. Colour T° :	2700K / 3000K / 4000K - Other possible temperatures, contact us. RGB
. Product Flux :	230 – 730 lm/m (3000K)
. Efficacy :	48 – 50 lm/W
. CRI :	80+ / 90+ / 98+
. Optic :	112°
. Colour T° :	-25°C to +50°C
. Adjustable :	No
. Dimensions :	8 mm x 10 mm (L _{max} = 3m)
. Weight :	-
. Protection :	IP67
. Resistant :	UV
. Impact :	-
. Static Load :	-
. High Pressure :	No
. Protection :	Classe III
. Power :	4,8 W/ml - 14,4 W/ml
. Power supply :	24VDC
. Driver :	Remote
. Control :	On-Off / 1-10V* / DALI* / DMX* (with adequate driver) *Optional control through smartphone bluetooth CASAMBI
. Cable :	150mm – 2000mm
. Energy class :	G
. Norms :	EN 62031 / ETL
. Warranty :	2 years standard