


LTS-LINE (2025-00)

Small modular linear LED line for outdoor use



8mm

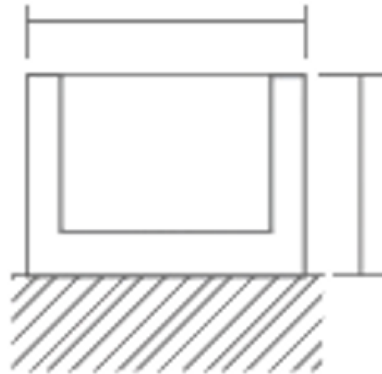

9mm

. Material :	Anodized Aluminium, polyurethane	. Epoxy Paint :	Optional
-			
-			
. Fixing :	Thermal conductive adhesive tape		
. LED Source :	3 SDCM - L70B50 at 50.000hr	. Operating T° :	-35°C/+50°C
. Color T° :	2700K / 3000K / 3500K / 4000K - Other possible temperatures. RGB		
. Luminous flux :	230 – 730lm/m (3000K)	. Typ. Efficacy :	48 – 50lm/W
. CRI :	80+ / 90+	. UV Resistance :	UV rays
. Optic :	112°	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP67
. Weight :	-	. Impact :	-
. Dimensions :	8mmx10mm (Lmax = 3m)	. Static load :	-
. Power supply :	24VDC	. Protection Class :	Class III
. Max Power :	4,8W/ml - 14,4W/ml	. Energy Class :	G
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	150mm – 2000mm		
. Norms :	EN 62031 / ETL		
. Warranty :	2 years standard (extendable to 5 years on demand)		