


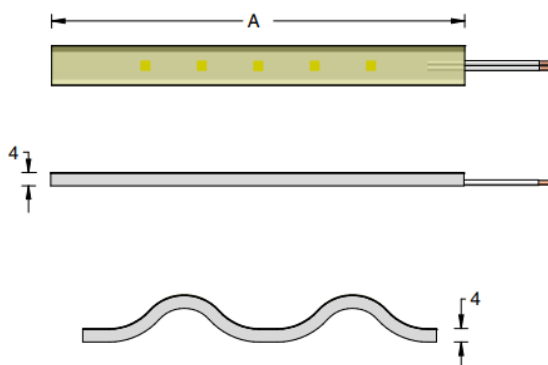


FLEX-AQ

Flexible stripLED for outdoor use



Profilé de montage en polycarbonate
Polycarbonate mounting profile



- . **Material :** Polyurethane housing
- . **Fixing :** Mounting profile in Polycarbonate
- . **Source :** 56 - 112 - 168 LED/ ml – 3 SDCM – L70B50 @ 50.000hr
- . **Colour T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
RGB
- . **Product Flux :** 131 – 1 630lm/m (at 3000K)
- . **Efficacy :** 109lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 112°
- . **Operating T° :** -25°C to +50°C
- . **Adjustable :** No
- . **Dimensions :** 4mm x 12mm (L(A) = 4m – 35m, Rmin = 10cm)
- . **Weight :** -
- . **Protection :** IP67
- . **Impact :** -
- . **Static Load :** -
- . **High Pressure :** No
- . **Protection Class :** Class III
- . **Power :** 1.2W/ml - 14,4 W/ml
- . **Technology :** Stabilized Current
- . **Power supply :** 24VDC
- . **Driver :** Déporté / Remote
- . **Control :** ON-OFF / 1-10V* / DALI* / DMX* (with adequate driver)
* Smartphone bluetooth CASAMBI control option possible
- . **Cable :** 150mm – 2000mm
- . **Energy class :** F
- . **Norms :** EN 62031 / ETL
- . **Warranty :** 2 years standard (possible extension)