




FLEX-AQ (2025-00)

Flexible stripLED for outdoor use

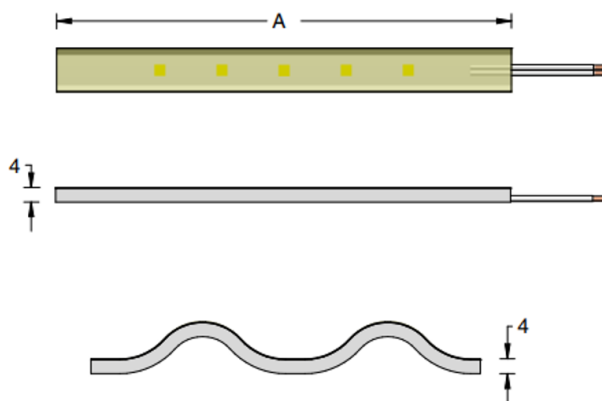

Profilé de montage en polycarbonate



. Material :	Polyurethane housing	. Epoxy Paint :	Optional
-			
-			
. Fixing :	Mounting profile in Polycarbonate		
. LED Source :	56 - 112 LED/ml 3 SDCM - L70B50 at 50.000hr	. Operating T° :	-25°C/+50°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures. RGB		
. Luminous flux :	131 – 1 630lm/m (at 3000K)	. Typ. Efficacy :	109lm/W
. CRI :	80+ / 90+	. UV Resistance :	UV rays, Salt and Solvents
. Optic :	112°	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP67
. Weight :	-	. Impact :	-
. Dimensions :	4mmx12mm (L(A) = 4m – 35m, Rmin = 10cm)	. Static load :	-
. Power supply :	24VDC	. Protection Class :	Class III
. Max Power :	1.2W/ml - 14,4 W/ml	. Energy Class :	F
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	150mm – 2000mm		
. Norms :	EN 62031 / ETL		
. Warranty :	2 years standard (extendable to 5 years on demand)		