



FLEX-AT (2025-00)

Flexible dotless stripLED for outdoor use

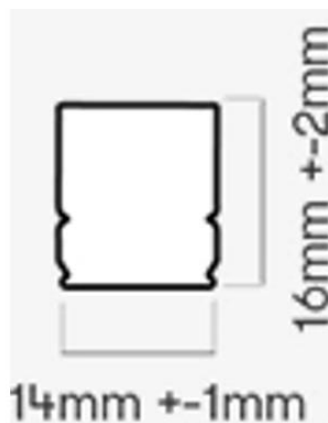

. Material :	Polyurethane housing	. Epoxy Paint :	Optional
-			
-			
. Fixing :	Anodized Aluminium beam		
. LED Source :	112 LED/ml 3 SDCM - L70B50 at 50.000hr	. Operating T° :	-25°C/+50°C
. Color T° :	2700K / 3000K / 4000K - Other possible temperatures. RGB		
. Luminous flux :	138lm/m -> 680lm/m - side 165lm/m -> 1290lm/m - top	. Typ. Efficacy :	71lm/W - side 89lm/W - top
. CRI :	80+ / 90+	. UV Resistance :	UV rays, Salt and Solvents
. Optic :	112°	. High pressure :	No
. Adjustable :	Yes	. Water Resistance :	IP67
. Weight :	0.5Kg/m	. Impact :	-
. Dimensions :	15mmx19mm (Lmax = 4.5m)	. Static load :	-
. Power supply :	24VDC	. Protection Class :	Class III
. Max Power :	1,9W -> 9,6W/ml - side 1,9W -> 14,4W/ml - top	. Energy Class :	G
. Control :	On-Off / 1-10V / DALI (with adequate driver)	. Driver :	Remote
. Cables :	150mm – 2000mm		
. Norms :	EN		
. Warranty :	2 years standard (extendable to 5 years on demand)		