


NANO

Recessed luminaire 1LED (without visible screws)

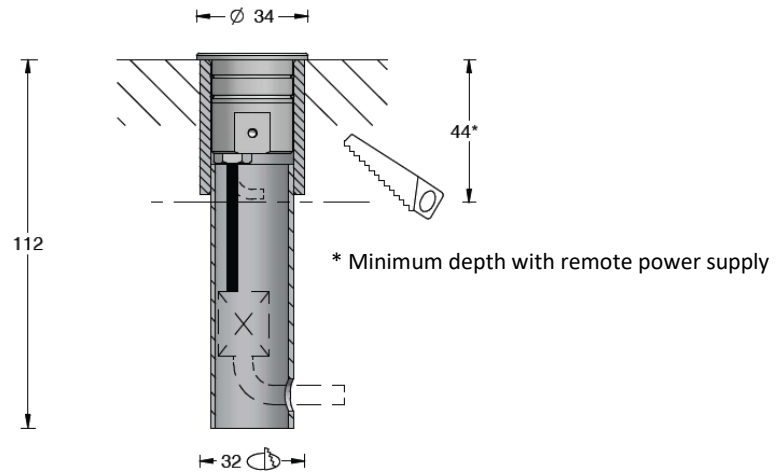

- . **Material:** Body in anodized Aluminium
Anodized Aluminium - Stainless steel 316L - Brass
- . **Fixing :** Tempered glass extra white
Wall or ground recessed
- . **LED Source :** 1 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
- . **Product flux :** 124lm (at 3000K-18°)
- . **Efficacy :** 113lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 18° / 24° / 30° / 37° / 53° / EL(20°x44°)

- . **Adjustable :** No
- . **Dimensions :** Ø34mm
- . **Weight :** -
- . **Protection :** IP68
- . **Impact :** IK10
- . **Static load :** -
- . **High pressure :** No

- . **Protection :** Classe III
- . **Power :** 1.1W
- . **Power supply :** 350mA
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V* / DALI* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (2x0.22mm² noir) – Monochrome

- . **Energy class:** D

- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard