
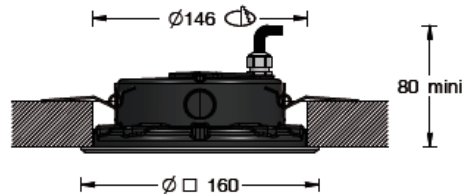


# GEMINI ORIENTABLE SPRING

Adjustable wall or ceiling recessed luminaire



- . **Material:** Body in cast treated aluminium  
Anodized Alum - Stainless steel 316L - Brass (Epoxy paint possible)  
Tempered glass extra white
- . **Fixing :** Recessed (hollow partition)
- . **LED Source :** 7 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.  
RGB(W)
- . **Product flux :** 1350lm (at 3000K-12°)
- . **Efficacy :** 108lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)
- . **Adjustable :** < 15°
- . **Dimensions :** Ø160mm x 80mm
- . **Weight :** 1.800Kg
- . **Protection :** IP68
- . **Impact :** IK09
- . **Static load :** 1.1T
- . **High pressure :** No
- . **Protection :** Classe III
- . **Power :** 11.2W
- . **Power supply :** 500mA
- . **Driver :** Included
- . **Control :** On-Off / 1-10V\* / DALI\* / DMX\* (with adequate driver)  
\*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (2x0.50mm<sup>2</sup> noir) - Monochrome  
3ml standard - (6x0.22mm<sup>2</sup> noir) – RGB
- . **Energy class :** E
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard