


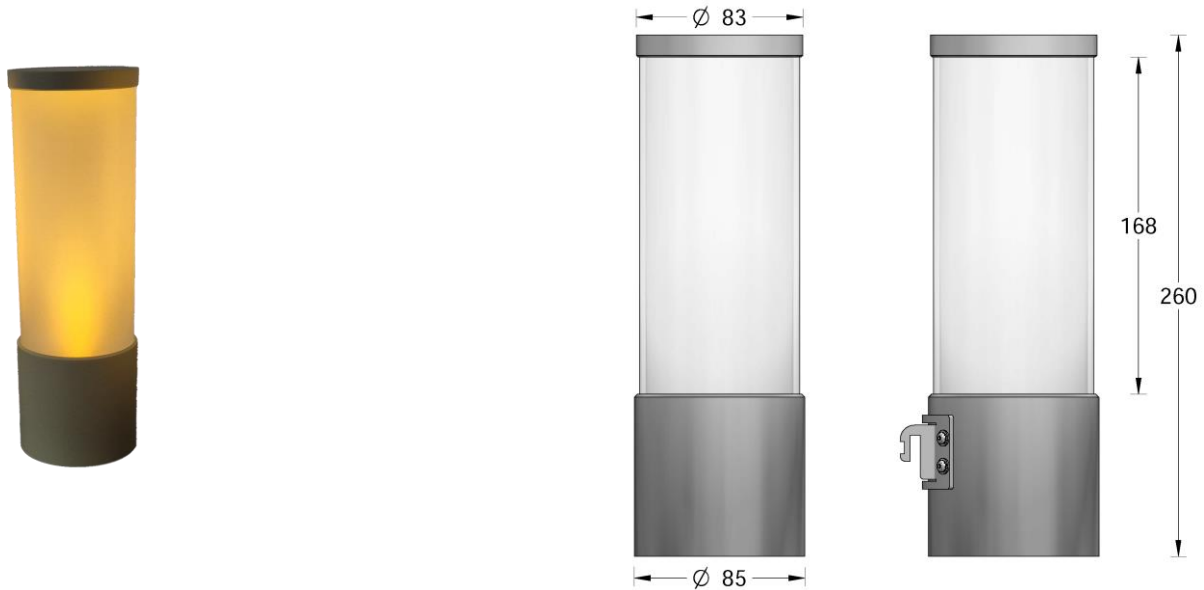

. Material :	Body in Aluminium anodisé	. Epoxy Paint :	Optional
	Disc Aluminium anodisé		
	PMMA		
. Fixing :	Bracket (Custom solution on request)		
. LED Source :	LED 3-SDCM – L90B10 at 100.000hr	. Operating T° :	-
. Color T° :	Candle effect		
. Luminous flux :	8lm (in peak when battery charged)	. Typ. Efficacy :	70lm/W
. CRI :	70+	. UV Resistance :	-
. Optic :	Frosted	. High pressure :	No
. Adjustable :	No	. Water Resistance :	IP66
. Weight :	1.0Kg	. Impact :	-
. Dimensions :	Ø83mmx260mm	. Static load :	-
. Power supply :	Solar powered by Sodium-ion battery with custom charger and BMS Recharge : Back Contact photovoltaic panel with antistatic surface	. Protection Class :	Class III
. Max Power :	0.12W	. Energy Class :	
. Control :	Autonomous	. Driver :	-
. Cables :	15 days (With a 2h/day cycle, 8lm max, and 100% battery) 6 months in its packaging box		
. Norms :	NF-EN 60529/60598-1/60598-2-1/60598-2-3/62471		
. Warranty :	2 years standard (extendable to 5 years on demand)		