




BOL

Adjustable fixture with a “Blade-Of-Light” effect

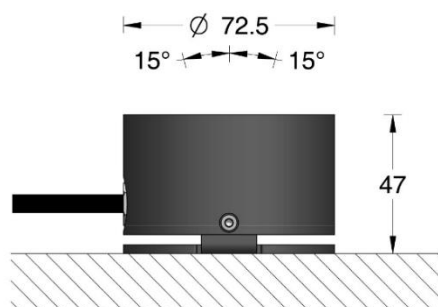

- . **Material :** Body in anodized Aluminium (RAL on demand)
Tempered glass extra white
- . **Fixing :** Surface mounted
- . **LED Source :** 1x4 LED - 3-SDCM – L70B10@50.000hr
- . **Color T° :** 2700K / 3000K - Other possible temperatures, contact us.
DynW /RGBW
- . **Product flux :** 67lm
- . **Efficiency :** 11lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 4° x 170°

- . **Adjustable :** ± 15°
- . **Dimensions :** Ø72.5mm x 47mm
- . **Weight :** 0.4Kg

- . **Protection :** IP67
- . **Impact :** IK09
- . **Static load :** -
- . **High pressure :** No

- . **Protection Class :** Class III
- . **Power :** 6.3W (monochrome)
- . **Power supply :** 500mA
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (2 x 0.75mm² black outside) - Monochrome
3ml standard - (8 x 0.22mm² black outside) - DynW / RGBW

- . **Energy class :** G
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty :** 2 years standard