
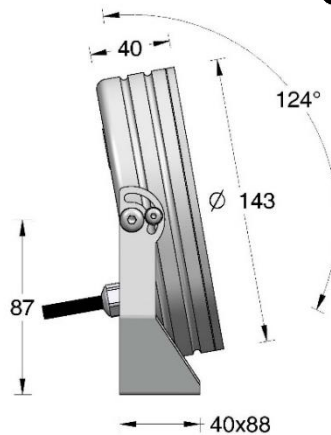


GEMINI-III

12 LED spotlight



- . Material: Anodized Aluminium - Stainless steel 316L- or Brass (Epoxy paint possible)
Bracket in Alu, Stainless steel 316L or Brass
Tempered glass extra white
- . Fixing : Surface mounted
- . LED Source : 12 LED 3-SDCM - L90B10@100.000hr
- . Color T° : 2700K / 3000K / 4000K - Other possible temperatures, contact us.
RGBW
- . Product flux : 3040lm (at 3000K-12°) - Alu
- . Efficacy : 132lm/W
- . CRI : 80+ / 90+
- . Optic : 12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)
- . Adjustable : Yes
- . Dimensions : Ø143mmx40mm
- . Weight : 1.60Kg
- . Protection : IP68
- . Impact : -
- . Static load : -
- . High pressure : No
- . Protection class : Classe III
- . Power : 27W (alu-laiton) / 19.5W (inox)
- . Power supply : 700mA / 500mA
- . Driver : Remote
- . Control : On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . Cables : 1ml standard - (2x0.50mm² noir) - Monochrome
3ml standard - (8x0.22mm² noir) - RGBW
- . Energy class : D
- . Norms : NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . Warranty: 2 years standard