
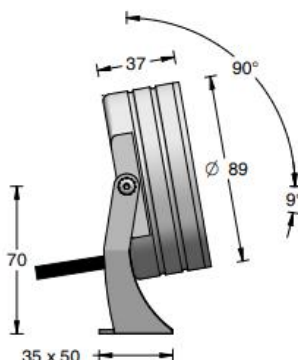


NARA


7 LED spotlight



- . **Material:** Body anodized Aluminium or Brass (Epoxy paint possible)
Tempered glass extra white
- . **Fixing :** On bracket
- . **LED Source :** 7 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
RGB(W)
- . **Product flux :** 1350lm (at 3000K-12°)
- . **Efficacy :** 135lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)
- . **Adjustable :** Yes
- . **Dimensions :** Ø89mm x 37mm
- . **Weight :** 0.710Kg / 1.400Kg
- . **Protection :** IP68
- . **Impact :** -
- . **Static load :** -
- . **High pressure :** No
- . **Protection :** Classe III
- . **Power :** 11.2W (monochrome)
- . **Power supply :** 500mA
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard (2x0.50mm² noir) - Monochrome
3ml standard (8x0.22mm² noir) – RGBW
- . **Energy class:** D
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard

NARA BOX

Spotlight on box

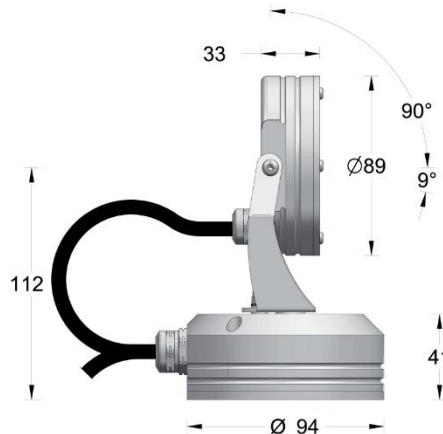

- . **Material:** Anodized Aluminium (Epoxy paint possible)
Stainless steel 316L
Tempered glass extra white
- . **Fixing :** Wall or ground
- . **LED Source :** 7 LED 3-SDCM - L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
- . **Product flux :** 1350lm (at 3000K-12°)
- . **Efficacy :** 135lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)
- . **Adjustable :** Yes
- . **Dimensions :** Ø89mm x 33mm
- . **Weight :** 0.710Kg / 1.400Kg
- . **Protection :** IP68
- . **Impact :** -
- . **Static load :** -
- . **High pressure :** No
- . **Protection :** Classe I
- . **Power :** 13.8W
- . **Power supply :** 240 VAC
- . **Driver :** Included
- . **Control :** On-Off / 1-10V* / DALI* / DMX* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (3x1mm² noir) – Monochrome
- . **Energy class:** D
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard