
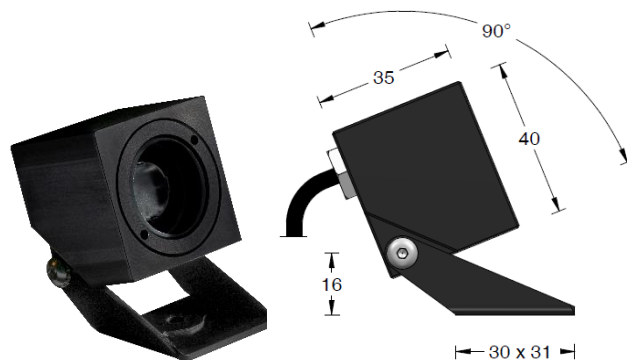
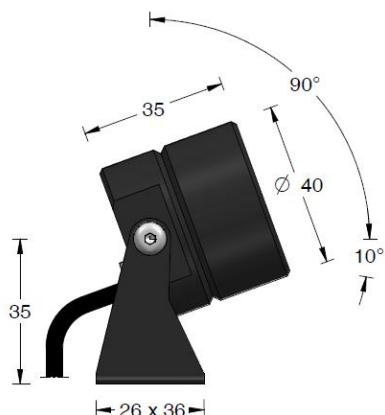


NIKO

1 LED spotlight



- . **Material:** Body in black anodized Aluminium or brass
Bracket in black anodized Aluminium or brass
Tempered glass extra white
- . **Fixing :** On bracket
- . **LED Source :** 1 LED 3-SDCM- L90B10@100.000hr
- . **Color T° :** 2700K / 3000K / 4000K - Other possible temperatures, contact us.
- . **Product flux :** 310lm (at 3000K-12°)
- . **Efficacy :** 117lm/W
- . **CRI :** 80+ / 90+
- . **Optic :** 12° / 24° / 30° / 50° / WW(12°x62°) / WW(24°x62°)
- . **Adjustable :** Yes
- . **Dimensions :** Ø40mmx35mm / □40mmx35mm
- . **Weight :** 0.310Kg
- . **Protection :** IP68
- . **Impact :** -
- . **Static load :** -
- . **High pressure :** No
- . **Protection :** Classe III
- . **Power :** 2.9W / 3.8W
- . **Power supply :** 900mA / 12-24VDC
- . **Driver :** Remote
- . **Control :** On-Off / 1-10V* / DALI* (with adequate driver)
*Optional control through smartphone bluetooth CASAMBI
- . **Cables :** 1ml standard - (2x0.22mm² noir) - Monochrome
- . **Energy class:** E / F
- . **Norms :** NF-EN 60529/60598-1/60598-2-1/60598-2-3/60598-2-5/62471
- . **Warranty:** 2 years standard